



K series helical bevel gear units

K系列斜齿—螺旋锥齿轮减速机


性能特点 FUTURE

斜齿轮-锥齿轮减速机采用零磨损设计, 维护少, 运行寿命长, 从技术上来说是非常经济的直角减速机。它的效率非常高, 是实实在在的节能高手。


Thanks to their long maintenance-free operating life and their wear-free gearing, our helical-bevel gear units are – technically speaking – economical right-angle gear units. Their high level of efficiency, however, makes them real energy savers.




K系列减速机有以下设计方案：
K series gear units are available in the following designs:

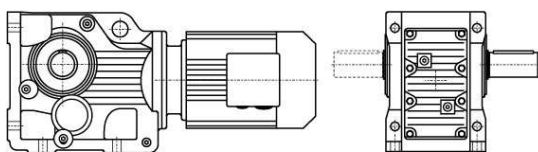


K..Y..
底脚轴伸式安装螺旋锥齿轮减速机
Foot-mounted helical-bevel gear units with solid shaft




KAB...Y..
底脚空心轴安装螺旋锥齿轮减速机
Foot-mounted helical-bevel gear units with hollow shaft




KA...Y..
空心轴安装螺旋锥齿轮减速机
Helical-bevel gear units with hollow shaft

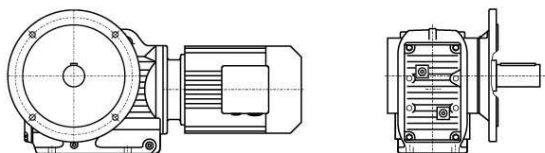


KF...Y..
法兰轴伸式安装螺旋锥齿轮减速机
Flange-mounted helical-bevel gear units with solid shaft

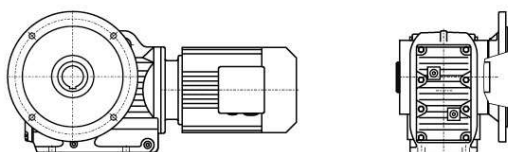


KAF...Y..
法兰空心轴安装螺旋锥齿轮减速机
Flange-mounted helical-bevel gear units with hollow shaft

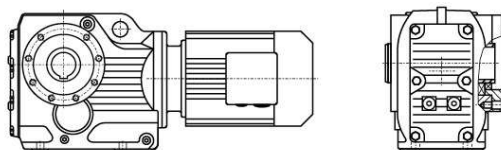


KAZ...Y..
小法兰空心轴安装螺旋锥齿轮减速机
Short-flange-mounted helical-bevel gear units with hollow shaft

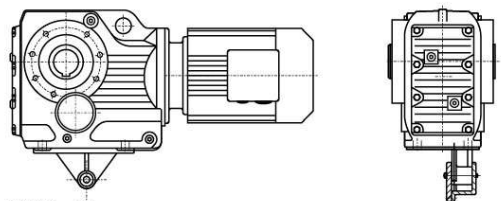


KAT...Y..
带防转臂空心轴安装螺旋锥齿轮减速机
Torque-arm-mounted helical-bevel gear units with hollow shaft

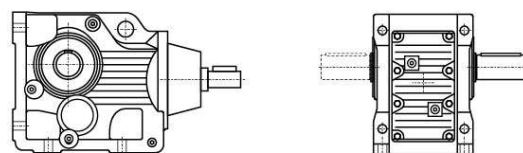


K (KF, KA, KAF, KAB, KAZ) S...
轴输入的螺旋锥齿轮减速机
Shaft input helical-bevel gear units

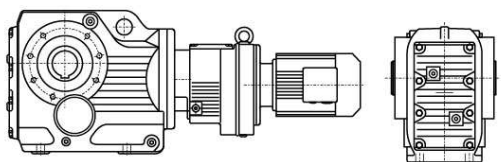

KA (K, KF, KAF, KAB, KAZ) ...R...Y..
组合式螺旋锥齿轮减速机
Combinatorial helical-bevel gear units

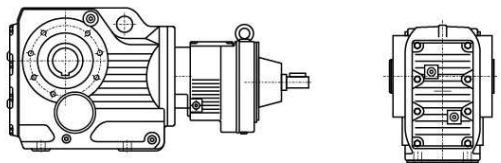

KA (K, KF, KAF, KAB, KAZ) S...R...
轴输入的组合式螺旋锥齿轮减速机
Shaft input combinatorial helical-bevel gear units

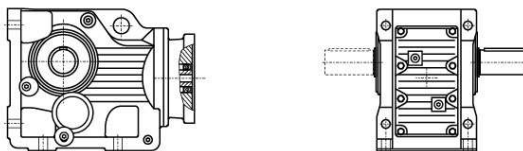

KA (K, KF, KAF, KAB, KAZ) ...Y..
电机用户自配或配特殊电机时需加联接法兰
When equipping the user's motor or the special one, the flange is required to be connected



型号与标记:

Type Designations:

K F 37-Y 0.55-4P-24.99-M1-180°-A-CW 减速机类型 — K 结构形式 — F 机座号 — 37 电机代号 — Y 电机功率、极数 — 0.55-4P 传动比 — 24.99 安装形式 — M1 电机接线盒位置 — 180° 输出轴、锁紧盘或法兰方向 — A 输出轴旋转方向 — CW	K F 37-Y 0.55-4P-24.99-M1-180°-A-CW Gear units type — K Structure — F Size — 37 Motor code — Y Motor power, pole — 0.55-4P Ratio — 24.99 Mounting position — M1 Position of the motor thermal box — 180° Position of output shaft, shrink disk or flang — A Rotate direction of output shaft — CW
减速机类型: 斜齿—螺旋锥齿轮减速机	Gear units type: Helical-bevel gear units
结构形式: 普通轴伸式 (省略) 轴装式 A 轴伸法兰式 F 轴装法兰式 AF 轴装小法兰式 AZ 轴装底脚式 AB 轴装带防转臂 AT 普通轴伸式, 轴输入 S 普通轴装式, 轴输入 AS 轴伸法兰式, 轴输入 FS 轴装法兰式, 轴输入 AFS *带锁紧盘式 H..(H,HF,HZ,HT)	Structure: Foot-mounted solid shaft output (-) Hollow shaft output A Flange-mounted solid shaft output F Flange-mounted hollow shaft output AF Short-flange-mounted hollow shaft output AZ Foot-mounted hollow shaft output AB Torque-arm-mounted hollow shaft output AT Foot-mounted solid shaft output, shaft input S Hollow shaft output, shaft input AS Flange-mounted solid shaft output, shaft input FS Flange-mounted hollow shaft output, shaft input AFS *Hollow shaft output with shrink disk H..(H,HF,HZ,HT)
规格: (见选型参数表)	Size: (see selection table)
电机代号: 普通 (更新) Y(Y2) 防 爆 B 直 流 Z 制 动 YEJ 多 速 D 变 频 YVP 电磁调速 YCT 冶金起重 R 变频制动 YVPJ 辊 道 G	Motor code: Ordinary(renew) Y(Y2) Flame-proof B Direct current Z Brake YEJ Multi-speed D Variable frequency YVP Electromagnetism speed modulation YCT Hoisting in metallurgy R Variable frequency and brake YVPJ Roller tables G
电机功率、极数: (见选型参数表)	Motor power, pole : (see selection table)
传动比: (见选型参数表)	Ratio: (see selection table)
安装形式: M1、M2、M3、M4、M5、M6 (见第94页)	Mounting position: M1、M2、M3、M4、M5、M6(see page 94)
电机接线盒位置: 0°、90°、180°、270° (见第94页)	Position of the motor thermal box: 0°、90°、180°、270° (see page 94)
输出轴、锁紧盘或法兰方向: 从电机尾部看左边为 A 从电机尾部看右边为 B (见安装形式) 从电机尾部看左右边为 A+B	Position of output shaft or flange: viewing on motor end:left side -A, right side-B,both sides-A+B(see mounting position)
输出轴旋转方向(面对输出轴方向看): 顺时针方向 CW 逆时针方向 CCW	Rotate direction of output shaft (viewing on output shaft): Clockwise CW Counter clockwise CCW


*带锁紧盘式, 详见412-413页。

*Hollow shaft output with shrink disk, see P412-413 for detail.



安装形式


Mounting position

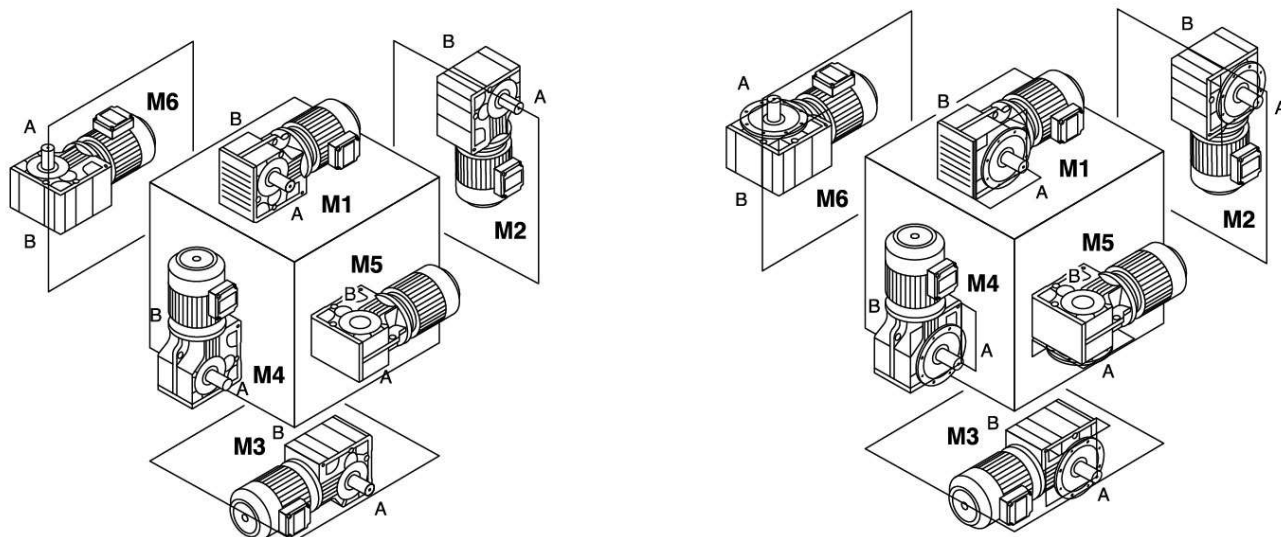


K

电机接线盒位置


Position of the motor thermal box




0°



90°



180°



270°

输入功率及许用转矩

Input power rating and permissible torque

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
结构形式 Structure	K KA KF KAF KAZ KAT KAB											
输入功率 Input power rating(kW)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
传动比 Ratio	5.36~ 106.38	5.81~ 131.87	6.57~ 145.14	7.14~ 144.79	7.24~ 192.18	7.19~ 197.37	8.95~ 176.05	8.74~ 141.46	8.68~ 146.07	12.65~ 150.41	17.28~ 163.91	17.27~ 180.78
许用转矩 (N.m) Permissible torque	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000

减速机重量

Gear unit weight

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
重量 (kg) Weight	11	20	27	33	57	85	130	250	380	610	1015	1700

所注重量为平均值, 仅供参考

The weights are mean values, only for reference.



润滑油量表 Lubrication table

K...,KAB...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.3	1	1
K..47	0.8	1.3	1.5	2	1.6	1.6
K..57	1.2	2.3	2.5	3	2.6	2.4
K..67	1.1	2.4	2.6	3.4	2.6	2.6
K..77	2.2	4.1	4.4	5.9	4.2	4.4
K..87	3.7	8	8.7	10.9	7.8	8
K..97	7	14	15.7	20	15.7	15.5
K..107	10	21	25.5	33.5	24	24
K..127	21	41.5	44	54	40	41
K..157	31	62	65	90	58	62
K..167	35	100	100	125	85	85
K..187	60	170	170	205	130	130

KF...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
KF37	0.5	1.1	1.1	1.5	1	1
KF47	0.8	1.3	1.7	2.2	1.6	1.6
KF57	1.3	2.3	2.7	3	2.9	2.7
KF67	1.1	2.4	2.8	3.6	2.7	2.7
KF77	2.1	4.1	4.4	6	4.5	4.5
KF87	3.7	8.2	9	11.9	8.4	8.4
KF97	7	14.7	17.3	21.5	15.7	16.5
KF107	10	22	26	35	25	25
KF127	21	41.5	46	55	41	41
KF157	31	66	69	92	62	62

K

KA...、KAF...、KAZ...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.4	1	1
K..47	0.8	1.3	1.6	2.1	1.6	1.6
K..57	1.3	2.3	2.7	3	2.9	2.7
K..67	1.1	2.4	2.7	3.6	2.6	2.6
K..77	2.1	4.1	4.6	6	4.4	4.4
K..87	3.7	8.2	8.8	11.1	8	8
K..97	7	14.7	15.7	20	15.7	15.7
K..107	10	20.5	24	32	24	24
K..127	21	41.5	43	52	40	40
K..157	31	66	67	87	62	62
KA..167	35	100	100	125	85	85
KA..187	60	170	170	205	130	130



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.18kW						0.18kW					
0.09	16482	14975	0.74			1.5	994	903	0.78		
0.11	13692	12440	0.89			1.8	873	793	0.88		
0.13	12013	10914	1.0			2.0	767	697	1.0		
0.14	10807	9819	1.1			2.3	675	613	1.1	K 67R37	4
0.16	9293	8443	1.3	K 127R77	4	2.6	597	542	1.3	KF 67R37	4
0.19	8236	7483	1.5	KF 127R77	4	3.0	518	471	1.5	KA 67R37	4
0.21	7226	6565	1.7	KA 127R77	4	3.3	462	420	1.7	KAF67R37	4
0.24	6388	5804	1.9	KAF127R77	4	3.9	397	361	1.9		
0.28	5533	5027	2.2			4.3	356	323	2.2		
0.31	4868	4423	2.5			5.1	299	272	2.6		
0.37	4184	3801	2.9								
0.43	3563	3237	3.4								
0.17	9037	8211	0.8			2.3	677	615	0.8		
0.19	7888	7167	1.0			2.6	599	544	0.9		
0.23	6711	6097	1.1			2.9	521	473	1.1		
0.25	6144	5582	1.2			3.3	463	421	1.2		
0.27	5575	5065	1.3	K 107R77	4	3.8	398	362	1.4	K 57R37	4
0.32	4732	4299	1.6	KF 107R77	4	4.4	351	319	1.6	KF 57R37	4
0.37	4135	3757	1.8	KA 107R77	4	5.1	300	273	1.9	KA 57R37	4
0.43	3562	3236	2.1	KAF107R77	4	5.8	264	240	2.1	KAF57R37	4
0.48	3158	2869	2.4			6.5	237	215	2.4		
0.56	2756	2504	2.7			7.2	211	192	2.7		
0.63	2425	2203	3.1			8.4	183	166	3.1		
0.30	5139	4669	0.79			3.7	413	375	0.9		
0.34	4493	4082	0.90			4.3	359	326	1.0		
0.39	3944	3583	1.0			4.8	318	289	1.2		
0.45	3421	3108	1.2			5.6	275	250	1.4	K 47R37	4
0.50	3035	2757	1.3			6.2	248	225	1.5	KF 47R37	4
0.57	2662	2419	1.5			7.0	218	198	1.7	KA 47R37	4
0.65	2337	2123	1.7	K 97R57	4	8.3	184	167	2.0	KAF47R37	4
0.75	2043	1856	2.0	KF 97R57	4	9.3	164	149	2.3		
0.86	1789	1625	2.3	KA 97R57	4	11	141	128	2.7		
0.97	1574	1430	2.6	KAF97R57	4						
1.1	1388	1261	2.9			6.8	226	205	0.83	K 37R17	4
1.3	1213	1102	3.3			7.7	199	181	0.94	KF 37R17	4
1.5	1053	957	3.8			8.7	176	160	1.07	KA 37R17	4
1.6	941	855	4.3			10	150	136	1.26	KAF37R17	4
1.9	818	743	4.9			11	140	127	1.34		
2.1	717	651	5.6								
0.45	3420	3107	0.74			5.9	275	144.79	2.8	K 67	6
0.51	3003	2728	0.85			6.9	235	123.54	3.3	KF 67	6
0.59	2610	2371	0.97			7.9	205	108.03	3.8	KA 67	6
0.67	2298	2088	1.1			8.3	195	102.62	4.0	KAF67	6
0.75	2041	1854	1.2	K 87R57	4						
0.84	1825	1658	1.4	KF 87R57	4	9.6	168	144.79	4.6	K 67	4
1.0	1557	1415	1.6	KA 87R57	4	11	144	123.54	5.4	KF 67	4
1.1	1353	1229	1.9	KAF87R57	4	13	126	108.03	6.1	KA 67	4
1.3	1187	1078	2.1								
1.5	1047	951	2.4			5.9	276	145.14	2.0	K 57	6
1.7	921	837	2.8			6.9	235	123.85	2.4	KF 57	6
1.9	799	726	3.2			7.8	206	108.29	2.7	KA 57	6
						8.3	196	102.88	2.9	KAF57	6
						9.4	172	90.26	3.3		
0.9	1666	1514	0.9			9.6	169	145.14	3.3		
1.0	1528	1388	1.0			11	144	123.85	3.9	K 57	4
1.1	1341	1218	1.1			13	126	108.29	4.5	KF 57	4
1.3	1159	1053	1.3	K 77R37	4	14	120	102.88	4.7	KA 57	4
1.5	1017	924	1.4	KF 77R37	4	15	105	90.26	5.4	KAF57	4
1.7	897	815	1.6	KA 77R37	4	18	89	76.56	6.3		
2.0	780	709	1.9	KAF77R37	4						
2.2	685	622	2.1			6.4	251	131.87	1.50	K 47	6
2.5	608	552	2.4			7.0	231	121.48	1.63	KF 47	6
2.9	534	485	2.7			8.1	198	104.37	1.90	KA 47	6
3.2	471	428	3.1			9.4	173	90.86	2.2	KAF47	6
3.8	404	367	3.6			10	162	85.12	2.3		



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW						0.25kW					
11	153	131.87	2.5	K 47	4	0.86	2484	1625	1.6		
12	141	121.48	2.7	KF 47	4	1.0	2186	1430	1.8	K 97R57	4
13	121	104.37	3.1	KA 47	4	1.1	1928	1261	2.1	KF 97R57	4
15	106	90.86	3.6	KAF47	4	1.3	1685	1102	2.4	KA 97R57	4
16	99	85.12	3.8			1.5	1463	957	2.8	KAF97R57	4
						1.6	1307	855	3.1		
8.0	202	106.38	0.93	K 37	6	0.7	3192	2088	0.80		
8.7	186	97.81	1.01	KF 37	6	0.7	2834	1854	0.90		
10	159	83.69	1.18	KA 37	6	0.8	2535	1658	1.0		
12	138	72.54	1.36	KAF37	6	1.0	2163	1415	1.2	K 87R57	4
13	124	106.38	1.52			1.1	1879	1229	1.4	KF 87R57	4
14	114	97.81	1.65			1.3	1648	1078	1.5	KA 87R57	4
17	97	83.69	1.93			1.5	1454	951	1.7	KAF87R57	4
19	84	72.54	2.2			1.7	1280	837	2.0		
21	79	67.80	2.4			1.9	1110	726	2.3		
24	68	58.60	2.8			2.2	975	638	2.6		
28	58	49.79	3.2								
31	52	44.46	3.6			1.3	1610	1053	0.9		
37	44	37.97	4.3			1.5	1413	924	1.0		
39	41	35.57	4.5	K 37	4	1.7	1246	815	1.2		
46	35	29.96	5.4	KF 37	4	2.0	1084	709	1.3		
48	34	28.83	5.6	KA 37	4	2.2	951	622	1.5		
56	29	24.99	6.5	KAF37	4	2.5	844	552	1.7	K 77R37	4
60	27	23.36	6.7			2.9	741	485	2.0	KF 77R37	4
69	23	20.19	7.4			3.2	654	428	2.2	KA 77R37	4
81	20	17.15	8.5			3.9	547	358	2.7	KAF77R37	4
91	18	15.31	9.2			4.3	489	320	3.0		
106	15	13.08	10			4.9	433	283	3.4		
114	14	12.14	11			5.7	376	246	3.9		
133	12	10.49	12			6.4	330	216	4.4		
156	10	8.91	15			7.3	292	191	5.0		
175	9	7.96	16			8.2	260	170	5.6		
0.25kW						2.3	937	613	0.8		
0.14	15010	9819	0.81			2.6	829	542	0.9		
0.16	12907	8443	0.95			3.0	720	471	1.1	K 67R37	4
0.19	11438	7482	1.07	K 127R77	4	3.3	642	420	1.2	KF 67R37	4
0.21	10036	6565	1.2	KF 127R77	4	3.9	552	361	1.4	KA 67R37	4
0.24	8872	5804	1.4	KA 127R77	4	4.3	494	323	1.6	KAF67R37	4
0.28	7685	5027	1.6	KAF127R77	4	5.1	416	272	1.9		
0.31	6761	4423	1.8			5.8	367	240	2.1		
0.37	5811	3801	2.1			6.4	332	217	2.3		
0.43	4948	3237	2.5								
0.23	9320	6097	0.81			3.3	644	421	0.9		
0.25	8533	5582	0.88			3.8	553	362	1.0		
0.27	7743	5065	1.0			4.4	488	319	1.2		
0.32	6572	4299	1.1			5.1	417	273	1.4		
0.37	5743	3757	1.3			5.8	367	240	1.5	K 57R37	4
0.43	4947	3236	1.5	K 107R77	4	6.5	329	215	1.7	KF 57R37	4
0.48	4386	2869	1.7	KF 107R77	4	7.2	294	192	1.9	KA 57R37	4
0.56	3828	2504	2.0	KA 107R77	4	8.4	254	166	2.2	KAF57R37	4
0.63	3368	2203	2.2	KAF107R77	4	9.9	216	141	2.6		
0.74	2857	1869	2.6			11	193	126	2.9		
0.82	2582	1689	2.9			13	165	108	3.4		
0.91	2343	1533	3.2			15	145	95	3.9		
1.06	2013	1317	3.7								
0.45	4751	3108	0.9			4.2	536	154.02	2.7	K 77	8
0.50	4215	2757	1.0	K 97R57	4	4.8	471	135.28	3.1	KF 77	8
0.57	3698	2419	1.1	KF 97R57	4	5.0	447	128.52	3.3	KA 77	8
0.65	3245	2123	1.2	KA 97R57	4	5.7	395	113.56	3.7	KAF77	8
0.75	2837	1856	1.4	KAF97R57	4						
						4.4	507	192.18	2.9	K 77	6
						4.7	474	179.37	3.1	KF 77	6
						5.5	407	154.02	3.6	KA 77	6
						6.3	357	135.28	4.1	KAF77	6



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.25kW						0.37kW					
5.2	430	123.54	1.8	K 67	8	0.19	16930	7483	0.72	K 127R77	4
6.0	376	108.03	2.1	KF 67	8	0.21	14853	6565	0.82		
6.3	357	102.62	2.2	KA 67	8	0.24	13131	5804	0.93		
7.2	313	90.04	2.5	KAF67	8	0.28	11373	5027	1.07		
						0.31	10007	4423	1.22		
5.9	382	144.79	2.0	K 67	6	0.37	8600	3801	1.42	KA 127R77	4
6.9	326	123.54	2.4	KF 67	6	0.43	7324	3237	1.67	KAF127R77	4
7.9	285	108.03	2.7	KA 67	6	0.72	4357	1926	2.80		
8.3	271	102.62	2.8	KAF67	6	0.79	3975	1757	3.07		
						0.90	3486	1541	3.51		
9.6	234	144.79	3.3	K 67	4	0.37	8500	3757	0.88	K 107R77	4
11	199	123.54	3.9	KF 67	4	0.43	7321	3236	1.03		
13	174	108.03	4.4	KA 67	4	0.48	6491	2869	1.16		
14	166	102.62	4.7	KAF67	4	0.56	5665	2504	1.33		
						0.63	4984	2203	1.51		
5.9	383	145.14	1.5	K 57	6	0.74	4229	1869	1.78	KA 107R77	4
6.9	327	123.85	1.7	KF 57	6	0.82	3821	1689	1.97	KAF107R77	4
7.8	286	108.29	2.0	KA 57	6	0.91	3468	1533	2.2		
8.3	272	102.88	2.1	KAF57	6	1.06	2980	1317	2.5		
9.4	238	90.26	2.4			1.21	2602	1150	2.9		
11	202	76.56	2.8								
9.6	234	145.14	2.4	K 57	4	0.65	4803	2123	0.84	K 97R57	4
11	200	123.85	2.8			0.75	4199	1856	0.96		
13	175	108.29	3.2			0.86	3676	1625	1.10		
14	166	102.88	3.4			0.97	3235	1430	1.25		
15	146	90.26	3.9			1.1	2853	1261	1.42		
18	124	76.56	4.6	KAF57	4	1.3	2493	1102	1.62	KA 97R57	4
						1.5	2165	957	1.87	KAF97R57	4
6.4	348	131.87	1.08	K 47	6	1.6	1934	855	2.1		
7.0	321	121.48	1.17			1.9	1681	743	2.4		
8.1	276	104.37	1.36			2.1	1473	651	2.7		
9.4	240	90.86	1.57			2.4	1296	573	3.1		
10	225	85.12	1.67	KAF47	6						
11	213	131.87	1.77	K 47	4	1.0	3201	1415	0.79	K 87R57	4
11	196	121.48	1.92			1.1	2781	1229	0.91		
13	169	104.37	2.2			1.3	2439	1078	1.04		
15	147	90.86	2.6			1.5	2152	951	1.18		
16	137	85.12	2.7	KAF47	4	1.7	1894	837	1.34	KF 87R57	4
						1.9	1643	726	1.55	KA 87R57	4
10	221	83.69	0.9	K 37	6	2.2	1443	638	1.76	KAF87R57	4
12	192	72.54	1.0			2.5	1272	562	2.0		
13	179	67.80	1.1			2.9	1072	474	2.4		
15	155	58.60	1.2			3.3	964	426	2.6		
17	131	49.79	1.4	KAF37	6	3.7	844	373	3.0		
13	172	106.38	1.1	K 37	4	1.7	1844	815	0.79	K 77R37	4
14	158	97.81	1.2			2.0	1604	709	0.91		
17	135	83.69	1.4			2.2	1407	622	1.04		
19	117	72.54	1.6			2.5	1249	552	1.17		
21	109	67.80	1.7			2.9	1097	485	1.33	KF 77R37	4
24	95	58.60	2.0			3.2	968	428	1.50	KA 77R37	4
28	80	49.79	2.3			3.9	810	358	1.80	KAF77R37	4
31	72	44.46	2.6			4.3	724	320	2.0		
37	61	37.97	3.1			4.9	640	283	2.3		
39	57	35.57	3.3			5.7	557	246	2.6		
46	48	29.96	3.9			6.4	489	216	3.0		
48	47	28.83	4.0			7.3	432	191	3.4		
56	40	24.99	4.7			8.2	385	170	3.8		
60	38	23.36	4.9			9.3	339	150	4.3		
69	33	20.19	5.3			3.3	950	420	0.81	K 67R37	4
81	28	17.15	6.1			3.9	817	361	0.94		
91	25	15.31	6.7			4.3	731	323	1.05		
106	21	13.08	7.3			5.1	615	272	1.25		
114	20	12.14	7.7			5.8	543	240	1.42	KF 67R37	4
133	17	10.49	8.9			6.4	491	217	1.57	KA 67R37	4
156	14	8.91	10			7.3	432	191	1.78	KAF67R37	4
175	13	7.96	11			8.4	376	166	2.05		
204	11	6.80	13			9.7	326	144	2.37		
218	10	6.37	13			12	269	119	2.86		



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
0.37kW						0.37kW							
5.1	618	273	0.91	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	8.5	392	104.37	0.96	K 47	6		
5.8	543	240	1.04			9.7	341	90.86	1.10	KF 47	6		
6.5	486	215	1.16			10	319	85.12	1.18	KA 47	6		
7.2	434	192	1.30			12	282	75.2	1.33	KAF47	6		
8.4	376	166	1.50			11	315	131.87	1.19	K 47 KF 47 KA 47 KAF47	4		
9.9	319	141	1.77			12	290	121.48	1.30				
11	285	126	1.98			13	249	104.37	1.51				
13	244	108	2.3			15	217	90.86	1.73				
15	215	95	2.6	16	203	85.12	1.85						
3.8	868	174.99	2.9	K 87	8	18	180	75.20	2.1				
4.1	813	164.05	3.1	KF 87	8	20	167	69.84	2.3				
4.6	729	147.09	3.5	KA 87	8	22	151	63.30	2.5				
				KAF87	8	14	234	97.81	0.80	K 37 KF 37 KA 37 KAF37	4		
4.5	740	197.27	3.4	K 87	6	17	200	83.69	0.94				
5.1	657	174.99	3.9	KF 87	6	19	173	72.54	1.08				
5.0	671	135.28	2.2	KA 87	6	21	162	67.80	1.16				
5.2	637	128.52	2.3	KAF87	6	24	140	58.60	1.34				
5.9	563	113.56	2.6	K 77	8	28	119	49.79	1.58				
6.9	481	97.05	3.0	KF 77	8	31	106	44.46	1.77				
5.7	578	154.02	2.5	KF 77	8	37	91	37.97	2.07				
6.5	508	135.28	2.9	KA 77	8	39	85	35.57	2.21				
6.9	482	128.52	3.0	KAF77	8	46	72	29.96	2.63				
7.8	426	113.56	3.4	K 77	6	48	69	28.83	2.73				
7.23	459	192.18	3.2	KF 77	4	56	60	24.99	3.15				
7.75	429	179.37	3.4	KA 77	4	60	56	23.36	3.28				
9.02	368	154.02	4.0	KAF77	4	69	48	20.19	3.60				
6.2	536	108.03	1.44	K 67	8	81	41	17.15	4.13				
6.5	509	102.62	1.52	KF 67	8	91	37	15.31	4.5				
7.4	446	90.04	1.73	KA 67	8	106	31	13.08	5.0				
7.2	464	123.54	1.66	KAF67	8	114	29	12.14	5.2				
8.2	405	108.03	1.90	K 67	6	133	25	10.49	6.0				
8.6	385	102.62	2.0	KF 67	6	156	21	8.91	7.1				
9.8	338	90.04	2.3	KA 67	6	175	19	7.96	7.7				
9.6	346	144.79	2.2	KAF67	6	204	16	6.80	8.7				
11	295	123.54	2.6	K 67	4	218	15	6.37	9.0				
13	258	108.03	3.0	KF 67	4	259	13	5.56	10				
15	215	90.04	3.6	KA 67	4	0.55kW							
18	182	76.37	4.2	KAF67	4	0.08	57099	16978	0.82			K 187R97 KA 187R97	4
7.1	465	123.85	1.2	K 67	6	0.10	47998	14272	0.98				
8.2	406	108.29	1.4	KF 67	6	0.11	44111	13116	1.07				
8.6	386	102.88	1.5	KA 67	6	0.12	39170	11647	1.20				
10	339	90.26	1.7	KAF67	6	0.19	24662	7333	1.9				
12	287	76.56	2.0	K 67	4	0.12	38783	11532	0.78	K 167R97 KA 167R97	4		
13	259	69.12	2.2	KF 67	4	0.14	34395	10227	0.87				
9.6	347	145.14	1.6	KA 67	4	0.16	28913	8597	1.04				
11	296	123.85	1.9	KAF67	4	0.21	21988	6538	1.37				
13	259	108.29	2.2	K 57	4	0.26	18046	5366	1.67				
14	246	102.88	2.3	KF 57	4	0.34	13651	4059	2.2	K 157R97 KF 157R97 KA 157R97 KAF157R97	4		
15	216	90.26	2.6	KA 57	4	0.20	23142	6881	0.73				
18	183	76.56	3.1	KAF57	4	0.23	19947	5931	0.85				
20	165	69.12	3.4	K 57	4	0.35	13365	3974	1.27				
				KF 57	4	0.46	10247	3047	1.65				
				KA 57	4	0.31	14875	4423	0.82	K 127R77 KF 127R77 KA 127R77 KAF127R77	4		
				KAF57	4	0.37	12783	3801	0.96				
						0.43	10886	3237	1.12				
						0.47	9891	2941	1.24				
						0.55	8569	2548	1.43				
						0.72	6477	1926	1.89				
						0.79	5909	1757	2.1				
						0.90	5183	1541	2.4				
						1.0	4513	1342	2.7				
						1.2	3958	1177	3.1				
						1.4	3447	1025	3.5				



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p
0.55kW						0.55kW					
0.48	9649	2869	0.78	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	3.8	1290	174.99	2.0	K 87	8
0.56	8421	2504	0.89			4.1	1209	164.05	2.1	KF 87	8
0.63	7409	2203	1.01			4.5	1084	147.09	2.3	KA 87	8
0.74	6286	1869	1.20							KAF87	8
0.82	5680	1689	1.32			4.5	1101	197.27	2.3	K 87	6
0.91	5156	1533	1.46			5.1	976	174.99	2.6	KF 87	6
1.1	4429	1317	1.70			5.4	915	164.05	2.8	KA 87	6
1.2	3868	1150	1.94			6.0	821	147.09	3.1	KAF87	6
1.4	3414	1015	2.2								
1.6	2929	871	2.6			6.5	755	135.28	1.9	K 77	8
1.8	2630	782	2.9	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	6.9	717	128.52	2.0	KF 77	8
2.0	2307	686	3.3			7.8	634	113.56	2.3	KA 77	8
2.3	2038	606	3.7			9.1	541	97.05	2.7	KAF77	8
1.0	4809	1430	0.8			5.7	859	154.02	1.70	K 77	6
1.1	4241	1261	1.0			6.5	755	135.28	1.93	KF 77	6
1.3	3706	1102	1.1			6.9	717	128.52	2.0	KA 77	6
1.5	3218	957	1.3			7.8	634	113.56	2.3	KAF77	6
1.6	2875	855	1.4			9.0	547	154.02	2.7	K 77	4
1.9	2499	743	1.6			10	481	135.28	3.0	KF 77	4
2.1	2189	651	1.8			11	457	128.52	3.2	KA 77	4
2.4	1927	573	2.1			12	403	113.56	3.6	KAF77	4
2.8	1695	504	2.4	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	14	345	97.05	4.2		
3.2	1470	437	2.8			7.2	689	123.54	1.12	K 67	6
3.6	1285	382	3.1			8.2	603	108.03	1.28	KF 67	6
4.6	1026	305	3.9			8.6	573	102.62	1.35	KA 67	6
1.5	3198	951	0.79			10	502	90.04	1.53	KAF67	6
1.7	2815	837	0.90			12	426	76.37	1.81		
1.9	2442	726	1.04			11	439	123.54	1.76	K 67	4
2.2	2146	638	1.18			13	384	108.03	2.0	KF 67	4
2.5	1890	562	1.34			15	320	90.04	2.4	KA 67	4
2.9	1594	474	1.59			18	271	76.37	2.8	KAF67	4
3.3	1433	426	1.77	K 77R37 KF 77R37 KA 77R37 KAF77R37	4	8.2	604	108.29	0.93	K 57 KF 57 KA 57 KAF57	6
3.7	1254	373	2.0			8.6	574	102.88	0.98		
4.2	1110	330	2.3			9.8	504	90.26	1.12		
4.7	985	293	2.6			12	427	76.56	1.32		
5.6	841	250	3.0			13	386	69.12	1.46	K 57 KF 57 KA 57 KAF57	4
5.9	794	236	3.2			14	339	60.81	1.66		
6.9	676	201	3.8			15	320	57.42	1.76		
2.5	1856	552	0.78			11	440	123.85	1.28	K 47 KF 47 KA 47 KAF47	4
2.9	1631	485	0.89			13	385	108.29	1.47		
3.2	1439	428	1.01			14	365	102.88	1.54		
3.9	1204	358	1.21			15	321	90.26	1.76		
4.3	1076	320	1.35	K 67R37 KF 67R37 KA 67R37 KAF67R37	4	18	272	76.56	2.1	K 37 KF 37 KA 37 KAF37	4
4.9	952	283	1.53			20	246	69.12	2.3		
5.7	827	246	1.76			23	216	60.81	2.6		
6.4	726	216	2.0			24	204	57.42	2.8		
7.3	642	191	2.3			13	371	104.37	1.01	K 47 KF 47 KA 47 KAF47	4
8.2	572	170	2.5			15	323	90.86	1.17		
9.3	504	150	2.9			16	302	85.12	1.24		
5.1	915	272	0.84			18	267	75.20	1.41		
5.8	807	240	0.95			20	248	69.84	1.52	K 37 KF 37 KA 37 KAF37	4
6.4	730	217	1.1			22	225	63.30	1.67		
7.3	642	191	1.2			24	202	56.83	1.86		
8.4	558	166	1.4			28	174	48.95	2.2		
9.7	484	144	1.6	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	30	164	46.03	2.3	K 37 KF 37 KA 37 KAF37	4
12	400	119	1.9			24	208	58.6	0.90		
7.2	646	192	0.87			28	177	49.79	1.06		
8.4	558	166	1.0			31	158	44.46	1.19		
9.9	474	141	1.2			37	135	37.97	1.39		
11	424	126	1.3								
13	363	108	1.6								
15	319	95	1.8								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.55kW						0.75kW					
39	126	35.57	1.49			1.9	3329	726	0.76		
46	106	29.96	1.77			2.2	2926	638	0.87		
48	102	28.83	1.84			2.5	2577	562	0.98		
56	89	24.99	2.1	K 37	4	2.9	2174	474	1.17	K 87R57	4
60	83	23.36	2.2	KF 37	4	3.3	1954	426	1.30	KF 87R57	4
69	72	20.19	2.4	KA 37	4	3.7	1711	373	1.48	KA 87R57	4
81	61	17.15	2.8	KAF37	4	4.2	1513	330	1.68	KAF87R57	4
91	54	15.31	3.0			4.7	1344	293	1.89		
106	46	13.08	3.3			5.6	1147	250	2.2		
114	43	12.14	3.5			5.9	1082	236	2.3		
133	37	10.49	4.0			6.9	922	201	2.8		
156	32	8.91	4.8								
175	28	7.96	5.2			3.9	1642	358	0.89	K 77R37	4
204	24	6.80	5.8			4.3	1468	320	0.99	KF 77R37	4
218	23	6.37	6.0			4.9	1298	283	1.12	KA 77R37	4
259	19	5.36	6.9			5.7	1128	246	1.29	KAF77R37	4
						6.4	991	216	1.47		
0.75kW						0.75kW					
0.11	60151	13116	0.78			3.9	1737	175.47	2.3	K 97	8
0.12	53414	11647	0.88	K 187R97	4	4.4	1508	152.31	2.7	KF 97	8
0.19	33630	7333	1.40	KA 187R97	4	4.8	1389	140.28	2.9	KA 97	8
0.21	30901	6738	1.52							KAF97	8
0.23	27443	5984	1.71								
0.16	39426	8597	0.76			4.6	1456	147.09	1.7	K 87	8
0.21	29984	6538	1.00	K 167R97	4	5.4	1254	126.68	2.0	KF 87	8
0.26	24609	5366	1.22	KA 167R97	4	5.9	1140	115.16	2.2	KA 87	8
0.34	18615	4059	1.62			6.6	1017	102.71	2.5	KAF87	8
0.41	15405	3359	1.95								
0.35	18225	3974	0.93	K 157R97	4	5.2	1295	174.99	2.0	K 87	6
0.46	13974	3047	1.21	KF 157R97	4	5.5	1214	164.05	2.1	KF 87	6
0.83	7705	1680	2.2	KA 157R97	4	6.2	1088	147.09	2.3	KA 87	6
1.02	6260	1365	2.7	KAF157R97	4	7.2	937	126.68	2.7	KAF87	6
0.43	14845	3237	0.82			7.0	956	197.27	2.7	K 87	4
0.47	13488	2941	0.91			8.0	848	174.99	3.0	KF 87	4
0.55	11685	2548	1.05			8.5	795	164.05	3.2	KA 87	4
0.72	8833	1926	1.38	K 127R77	4	9.4	712	147.09	3.6	KAF87	4
0.79	8058	1757	1.52	KF 127R77	4						
0.90	7067	1541	1.73	KA 127R77	4	6.7	1001	135.28	1.46	K 77	6
1.0	6154	1342	1.99	KAF127R77	4	7.1	951	128.52	1.53	KF 77	6
1.2	5398	1177	2.3			8.0	840	113.56	1.73	KA 77	6
1.4	4701	1025	2.6			9.4	718	97.05	2.0	KAF77	6
1.5	4123	899	3.0			10	658	88.97	2.2		
0.82	7746	1689	0.97			9.0	746	154.02	1.95	K 77	4
0.91	7030	1533	1.07			10	655	135.28	2.2	KF 77	4
1.1	6040	1317	1.25	K 107R77	4	11	623	128.52	2.3	KA 77	4
1.2	5274	1150	1.43	KF 107R77	4	12	550	113.56	2.6	KAF77	4
1.4	4655	1015	1.62	KA 107R77	4	14	470	97.05	3.1		
1.6	3994	871	1.88	KAF107R77	4						
1.8	3586	782	2.1			11	598	123.54	1.29		
2.0	3146	686	2.4			13	523	108.03	1.47	K 67	4
2.3	2779	606	2.7			15	436	90.04	1.77	KF 67	4
1.3	5054	1102	0.8			18	370	76.37	2.1	KA 67	4
1.5	4389	957	0.9			20	334	68.95	2.3	KAF67	4
1.6	3921	855	1.0			23	294	60.66	2.6		
1.9	3407	743	1.2	K 97R57	4	24	277	57.28	2.8		
2.1	2986	651	1.4	KF 97R57	4						
2.4	2628	573	1.5	KA 97R57	4	11	600	123.85	0.9		
2.8	2311	504	1.7	KAF97R57	4	13	525	108.29	1.1		
3.2	2004	437	2.0			14	498	102.88	1.1		
3.6	1752	382	2.3			15	437	90.26	1.3	K 57	4
4.6	1399	305	2.9			18	371	76.56	1.5	KF 57	4
5.4	1183	258	3.4			20	335	69.12	1.7	KA 57	4
6.0	1064	232	3.8			23	295	60.81	1.9	KAF57	4
7.0	913	199	4.4			24	278	57.42	2.0		
						28	237	48.89	2.4		
						31	215	44.43	2.6		



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p
0.75kW						1.1kW					
18	364	75.2	1.03			1.5	6047	899	2.0		
20	338	69.84	1.11			1.8	5314	790	2.3	K 127R77	4
22	307	63.30	1.23	K 47	4	2.0	4641	690	2.6	KF 127R77	4
24	275	56.83	1.37	KF 47	4	2.3	4029	599	3.0	KA 127R77	4
28	237	48.95	1.59	KA 47	4	2.6	3625	539	3.4	KAF127R77	4
30	223	46.03	1.69	KAF47	4	3.0	3148	468	3.9		
35	192	39.61	1.96			1.2	7735	1150	1.0		
39	171	35.39	2.2			1.4	6827	1015	1.1		
45	151	31.19	2.5			1.6	5859	871	1.3		
						1.8	5260	782	1.4	K 107R77	4
31	215	44.46	0.87			2.0	4614	686	1.6	KF 107R77	4
37	184	37.97	1.02			2.3	4076	606	1.8	KA 107R77	4
39	172	35.57	1.09			2.7	3464	515	2.2	KAF107R77	4
46	145	29.96	1.30			3.1	3060	455	2.5		
48	140	28.83	1.35			3.5	2704	402	2.8		
56	121	24.99	1.55			4.0	2361	351	3.2		
60	113	23.36	1.62			4.5	2065	307	3.6		
69	98	20.19	1.78	K 37	4						
81	83	17.15	2.0	KF 37	4	1.9	4998	743	0.81		
91	74	15.31	2.2	KA 37	4	2.1	4379	651	0.92	K 97R57	4
106	63	13.08	2.4	KAF37	4	2.4	3854	573	1.05	KF 97R57	4
114	59	12.14	2.6			2.8	3390	504	1.19	KA 97R57	4
133	51	10.49	3.0			3.2	2939	437	1.38	KAF97R57	4
156	43	8.91	3.5			3.6	2569	382	1.57		
175	39	7.96	3.8			4.1	2300	342	1.76		
204	33	6.80	4.3								
218	31	6.37	4.4			2.9	3188	474	0.80		
259	26	5.36	5.1			3.3	2865	426	0.89		
						3.7	2509	373	1.01	K 87R57	4
						4.2	2220	330	1.14	KF 87R57	4
						4.7	1971	293	1.29	KA 87R57	4
						5.6	1682	250	1.51	KAF87R57	4
						5.9	1587	236	1.60		
						6.9	1352	201	1.88		
						3.9	2548	175.47	1.6	K 97	8
						4.4	2212	152.31	1.8	KF 97	8
						4.8	2037	140.28	2.0	KA 97	8
						5.5	1810	124.61	2.2	KAF97	8
						5.2	1904	175.47	2.1	K 97	6
						5.9	1653	152.31	2.4	KF 97	6
						6.5	1522	140.28	2.7	KA 97	6
						7.3	1352	124.61	3.0	KAF97	6
						8.0	1238	175.47	3.3	K 97	4
						9.1	1074	152.31	3.7	KF 97	4
						10	989	140.28	4.1	KA 97	4
										KAF97	4
						5.2	1899	174.99	1.34	K 87	6
						5.5	1780	164.05	1.42	KF 87	6
						6.2	1596	147.09	1.59	KA 87	6
						7.2	1375	126.68	1.84	KAF87	6
						8.0	1234	174.99	2.1	K 87	4
						8.5	1157	164.05	2.2	KF 87	4
						9.5	1037	147.09	2.4	KA 87	4
						11	894	126.68	2.8	KAF87	4
						12	812	115.16	3.1		
						6.7	1468	135.28	0.99	K 77	6
						7.1	1395	128.52	1.04	KF 77	6
						8.0	1232	113.56	1.18	KA 77	6
						9.4	1053	97.05	1.38	KAF77	6
1.1kW						1.1kW					
0.15	62528	9363	0.75								
0.17	54267	8126	0.87								
0.19	48971	7333	0.96								
0.21	44998	6738	1.04	K 187R97	4						
0.23	39962	5984	1.18	KA 187R97	4						
0.26	35728	5350	1.32								
0.29	32122	4810	1.46								
0.32	29144	4364	1.61								
0.26	35835	5366	0.84								
0.29	32042	4798	0.94								
0.34	27107	4059	1.11								
0.42	22432	3359	1.34	K 167R97	4						
0.51	18305	2741	1.64	KA 167R97	4						
0.64	14518	2174	2.1								
0.82	11340	1698	2.7								
1.00	9363	1402	3.2								
1.08	8622	1291	3.5								
0.40	23480	3516	0.72								
0.46	20375	3051	0.83								
0.54	17430	2610	0.97								
0.60	15507	2322	1.09	K 157R97	4						
0.83	11219	1680	1.51	KF 157R97	4						
1.0	9116	1365	1.86	KA 157R97	4						
1.1	8207	1229	2.1	KAF157R97	4						
1.3	7299	1093	2.3								
1.5	6291	942	2.7								
1.6	5703	854	3.0								
0.72	12955	1926	0.9								
0.79	11818	1757	1.0	K 127R77	4						
0.90	10365	1541	1.2	KF 127R77	4						
1.0	9027	1342	1.4	KA 127R77	4						
1.2	7917	1177	1.5	KAF127R77	4						
1.4	6894	1025	1.8								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
1.1kW						1.5kW					
10	954	135.28	1.53	K 77 KF 77 KA 77 KAF77	4	0.21	61360	6738	0.77	K 187R97 KA 187R97	4
11	906	128.52	1.61		4	0.23	54494	5984	0.86		4
12	801	113.56	1.82		4	0.26	48720	5350	0.96		4
14	685	97.05	2.1		4	0.29	43803	4810	1.07		4
16	628	88.97	2.3		4	0.32	39741	4364	1.18		4
18	551	78.07	2.6	K 67 KF 67 KA 67 KAF67	4	0.39	32866	3609	1.43	K 167R97 KA 167R97	4
19	522	73.99	2.8		4	0.46	27884	3062	1.69		4
13	762	108.03	1.01		4	0.56	22940	2519	2.0		4
14	724	102.62	1.06		4	0.62	20654	2268	2.3		4
16	635	90.04	1.21		4	0.34	36964	4059	0.81		4
18	539	76.37	1.43	K 57 KF 57 KA 57 KAF57	4	0.42	30589	3359	0.98	K 157R97 KF 157R97 KA 157R97 KAF157R97	4
20	486	68.95	1.58		4	0.51	24961	2741	1.21		4
23	428	60.66	1.80		4	0.64	19798	2174	1.52		4
24	404	57.28	1.91		4	0.82	15463	1698	1.95		4
29	344	48.77	2.2		4	1.0	12767	1402	2.4		4
32	313	44.32	2.5	K 47 KF 47 KA 47 KAF47	4	1.1	11757	1291	2.6	K 127R87 KF 127R87 KA 127R87 KAF127R87	4
36	271	38.39	2.8		4	0.6	21118	2319	0.8		4
16	637	90.26	0.89		4	0.8	15299	1680	1.1		4
18	540	76.56	1.04		4	1.0	12431	1365	1.4		4
20	488	69.12	1.16		4	1.1	11192	1229	1.5		4
23	429	60.81	1.31	K 37 KF 37 KA 37 KAF37	4	1.3	9954	1093	1.7	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
24	405	57.42	1.39		4	1.5	8578	942	2.0		4
29	345	48.89	1.64		4	1.6	7777	854	2.2		4
32	313	44.43	1.80		4	2.5	5145	565	3.3		4
36	271	38.49	2.1		4	2.8	4581	503	3.7		4
39	252	35.70	2.2	K 37 KF 37 KA 37 KAF37	4	2.6	4881	536	2.5	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
46	214	30.28	2.6		4	3.3	3807	418	3.2		4
51	193	27.34	2.9		4	3.8	3342	367	3.7		4
58	170	24.05	3.3		4	0.80	16000	1757	0.76		4
62	160	22.71	3.5		4	0.91	14033	1541	0.87		4
72	136	19.34	4.0	K 27 KF 27 KA 27 KAF27	4	1.0	12221	1342	1.00	K 77R57 KF 77R57 KA 77R57 KAF77R57	4
80	124	17.57	4.2		4	1.2	10718	1177	1.14		4
92	107	15.22	4.6		4	1.4	9334	1025	1.31		4
106	93	13.25	4.7		4	1.6	8187	899	1.49		4
117	84	11.92	4.9		4	1.8	7194	790	1.70		4
124	79	11.26	5.1	K 27 KF 27 KA 27 KAF27	4	2.0	6284	690	1.94	K 57R57 KF 57R57 KA 57R57 KAF57R57	4
146	68	9.59	5.6		4	2.3	5455	599	2.2		4
161	61	8.71	6.0		4	2.6	4908	539	2.5		4
185	53	7.55	6.4		4	3.0	4262	468	2.9		4
213	46	6.57	7.0		4	3.4	3734	410	3.3		4
25	401	56.83	0.94	K 27 KF 27 KA 27 KAF27	4	1.4	9243	1015	0.8	K 47R57 KF 47R57 KA 47R57 KAF47R57	4
29	345	48.95	1.09		4	1.6	7932	871	0.9		4
30	325	46.03	1.16		4	1.8	7121	782	1.1		4
35	279	39.61	1.35		4	2.0	6247	686	1.2		4
40	250	35.39	1.51		4	2.3	5519	606	1.4		4
45	220	31.19	1.71	K 17 KF 17 KA 17 KAF17	4	2.7	4690	515	1.6	K 37R57 KF 37R57 KA 37R57 KAF37R57	4
48	207	29.32	1.82		4	3.1	4144	455	1.8		4
54	183	25.91	2.1		4	3.5	3661	402	2.1		4
64	154	21.81	2.4		4	4.0	3196	351	2.4		4
72	138	19.58	2.7		4	4.6	2796	307	2.7		4
47	211	29.96	0.89	K 17 KF 17 KA 17 KAF17	4	2.4	5218	573	0.8	K 27R57 KF 27R57 KA 27R57 KAF27R57	4
56	176	24.99	1.07		4	2.8	4590	504	0.9		4
60	165	23.36	1.11		4	3.2	3980	437	1.0		4
69	142	20.19	1.22		4	3.7	3479	382	1.2		4
82	121	17.15	1.40		4	4.1	3114	342	1.3		4
91	108	15.31	1.52	K 17 KF 17 KA 17 KAF17	4	4.6	2778	305	1.5	K 17R57 KF 17R57 KA 17R57 KAF17R57	4
107	92	13.08	1.68		4	5.4	2350	258	1.7		4
115	86	12.14	1.76		4	6.0	2113	232	1.9		4
133	74	10.49	2.0		4	7.0	1812	199	2.2		4
157	63	8.91	2.4		4						
176	56	7.96	2.6								
206	48	6.80	2.9								
220	45	6.37	3.0								
261	38	5.36	3.5								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
1.5kW						1.5kW					
4.2	3005	330	0.84	K 87R57	4	23	585	60.81	0.96		
4.8	2668	293	0.95	KF 87R57	4	24	552	57.42	1.02		
5.6	2277	250	1.11	KA 87R57	4	29	470	48.89	1.20		
5.9	2149	236	1.18	KAF87R57	4	32	427	44.43	1.32	K 57	4
7.0	1830	201	1.39			36	370	38.49	1.52	KF 57	4
7.7	1667	183	1.52			39	343	35.70	1.64	KA 57	4
						46	291	30.28	1.94	KAF57	4
4.9	2770	141.93	2.7	K 107	8	51	263	27.34	2.1		
5.8	2334	119.58	3.2	KF 107	8	58	231	24.05	2.4		
6.2	2163	110.83	3.5	KA 107	8	62	218	22.71	2.6		
				KAF107	8	72	186	19.34	2.9		
4.5	2972	152.31	1.36	K 97	8	35	381	39.61	0.99		
4.9	2738	140.28	1.48	KF 97	8	40	340	35.39	1.10		
5.5	2432	124.61	1.66	KA 97	8	45	300	31.19	1.25		
				KAF97	8	48	282	29.32	1.33	K 47	4
5.2	2569	175.47	1.57	K 97	6	54	249	25.91	1.51	KF 47	4
6.0	2229	152.31	1.81	KF 97	6	64	210	21.81	1.79	KA 47	4
6.6	2053	140.28	1.97	KA 97	6	72	188	19.58	2.0	KAF47	4
7.4	1824	124.61	2.2	KAF97	6	83	162	16.86	2.2		
8.0	1688	175.47	2.4	K 97	4	88	153	15.86	2.3		
9.2	1465	152.31	2.7	KF 97	4	103	131	13.65	2.6		
10	1349	140.28	3.0	KA 97	4	115	117	12.19	2.8		
11	1199	124.61	3.4	KAF97	4	119	113	11.77	3.0		
6.3	2153	147.09	1.18	K 87	6	60	225	23.36	0.82		
7.2	1854	126.68	1.37	KF 87	6	69	194	20.19	0.90		
7.9	1686	115.16	1.50	KA 87	6	82	165	17.15	1.03		
9.0	1503	102.71	1.69	KAF87	6	91	147	15.31	1.12	K 37	4
8.0	1683	174.99	1.51			107	126	13.08	1.23	KF 37	4
8.5	1578	164.05	1.61			115	117	12.14	1.29	KA 37	4
9.5	1415	147.09	1.79	K 87	4	133	101	10.49	1.49	KAF37	4
11	1218	126.68	2.1	KF 87	4	157	86	8.91	1.75		
12	1108	115.16	2.3	KA 87	4	176	77	7.96	1.90		
14	988	102.71	2.6	KAF87	4	206	65	6.80	2.2		
16	830	86.34	3.1			220	61	6.37	2.2		
						261	52	5.36	2.6		
8.0	1680	113.56	0.87	K 77	6	2.2kW					
9.4	1436	97.05	1.01	KF 77	6	0.33	57466	4364	0.82		
10	1317	88.97	1.11	KA 77	6	0.39	47524	3609	0.99		
12	1155	78.07	1.26	KAF77	6	0.46	40321	3062	1.17		
10	1301	135.28	1.12			0.50	37108	2818	1.27		
11	1236	128.52	1.18			0.56	33171	2519	1.42	K 187R97	4
12	1092	113.56	1.33			0.63	29866	2268	1.57	KA 187R97	4
14	933	97.05	1.56			0.69	27048	2054	1.74		
16	856	88.97	1.70	K 77	4	0.78	23979	1821	1.96		
18	751	78.07	1.94	KF 77	4	0.88	21135	1605	2.2		
19	712	73.99	2.0	KA 77	4						
22	623	64.75	2.3	KAF77	4						
24	561	58.34	2.6			0.52	36094	2741	0.83		
27	492	51.18	3.0			0.63	29655	2252	1.01		
31	434	45.16	3.4			0.65	28628	2174	1.05	K 167R97	4
35	385	40.04	3.8			0.84	22360	1698	1.35	KA 167R97	4
16	866	90.04	0.89			1.0	18462	1402	1.63		
18	735	76.37	1.05			1.1	17000	1291	1.77		
20	663	68.95	1.16			1.3	14498	1101	2.1		
23	583	60.66	1.32	K 67	4	1.5	12431	944	2.4		
24	551	57.28	1.40	KF 67	4						
29	469	48.77	1.64	KA 67	4	0.85	22123	1680	0.76		
32	426	44.32	1.81	KAF67	4	1.0	17975	1365	0.94	K 157R97	4
36	369	38.39	2.1			1.2	16184	1229	1.05	KF 157R97	4
39	343	35.62	2.2			1.3	14393	1093	1.18	KA 157R97	4
46	291	30.22	2.7			1.5	12404	942	1.36	KAF157R97	4
51	262	27.28	2.9			1.7	11246	854	1.50		
58	231	24.00	3.3			1.9	9955	756	1.70		



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
2.2kW						2.2kW					
2.6	7058	536	1.73	K 127R87	4	40	490	35.20	3.0	K 77	4
3.0	6229	473	1.96	KF 127R87	4	46	430	30.89	3.4	KF 77	4
3.4	5504	418	2.2	KA 127R87	4	49	407	29.27	3.6	KA 77	4
3.9	4833	367	2.5	KAF127R87	4	55	356	25.62	4.1	KAF77	4
4.3	4346	330	2.8								
1.4	13497	1025	0.91			23	844	60.66	0.91		
1.6	11838	899	1.03			25	797	57.28	0.97		
1.8	10403	790	1.17	K 127R77	4	29	678	48.77	1.14		
2.1	9086	690	1.34	KF 127R77	4	32	616	44.32	1.25		
2.4	7888	599	1.55	KA 127R77	4	37	534	38.39	1.44		
2.6	7098	539	1.72	KAF127R77	4	40	495	35.62	1.56		
3.0	6163	468	1.98			47	420	30.22	1.83		
3.5	5399	410	2.3			52	379	27.28	2.0		
						59	334	24.00	2.3	K 67	4
						63	315	22.66	2.3	KF 67	4
						74	268	19.30	2.7	KA 67	4
						81	244	17.54	2.9	KAF67	4
						93	211	15.19	3.1		
						107	184	13.22	3.4		
						116	170	12.24	2.9		
						136	145	10.42	3.2		
						150	132	9.47	3.4		
						173	114	8.20	3.6		
						199	99	7.14	4.0		
2.3	7980	606	0.94			32	618	44.43	0.91		
2.8	6782	515	1.11			37	535	38.49	1.05		
3.1	5992	455	1.26	K 107R77	4	40	497	35.70	1.14		
3.5	5294	402	1.42	KF 107R77	4	47	421	30.28	1.34		
4.0	4622	351	1.63	KA 107R77	4	52	380	27.34	1.48	K 57	4
4.6	4043	307	1.86	KAF107R77	4	59	334	24.05	1.69	KF 57	4
5.1	3648	277	2.1			63	316	22.71	1.79	KA 57	4
5.8	3200	243	2.4			73	269	19.34	2.0	KAF57	4
						81	244	17.57	2.1		
						93	212	15.22	2.4		
						107	184	13.25	2.3		
						119	166	11.92	2.4		
						126	157	11.26	2.5		
3.7	5030	382	0.80	K 97R57	4	55	360	25.91	1.04		
4.2	4504	342	0.90	KF 97R57	4	65	303	21.81	1.24		
4.7	4016	305	1.01	KA 97R57	4	73	272	19.58	1.38	K 47	4
5.5	3397	258	1.19	KAF97R57	4	84	234	16.86	1.52	KF 47	4
6.1	3055	232	1.32			90	221	15.86	1.62	KA 47	4
7.1	2620	199	1.54			104	190	13.65	1.78	KAF47	4
						116	170	12.19	1.94		
						121	164	11.77	1.61		
						134	147	10.56	1.79		
						156	127	9.10	2.1		
5.0	3948	141.93	1.90	K 107	8	109	182	13.08	0.85		
5.9	3326	119.58	2.3	KF 107	8	135	146	10.49	1.03	K 37	4
6.4	3083	110.83	2.4	KA 107	8	159	124	8.91	1.21	KF 37	4
7.1	2763	99.34	2.7	KAF107	8	178	111	7.96	1.32	KA 37	4
						209	95	6.80	1.49	KAF37	4
						223	89	6.37	1.54		
						265	75	5.36	1.77		
6.1	3200	152.31	1.26	K 97	6						
6.7	2947	140.28	1.37	KF 97	6						
7.5	2618	124.61	1.54	KA 97	6						
14	1443	103.78	2.80	KAF97	6						
8.1	2440	175.47	1.66								
9.3	2118	152.31	1.91	K 97	4						
10	1951	140.28	2.1	KF 97	4						
11	1733	124.61	2.3	KA 97	4						
14	1443	103.78	2.8	KAF97	4						
15	1346	96.80	3.0								
9.7	2046	147.09	1.24								
11	1762	126.68	1.44	K 87	4						
12	1602	115.16	1.58	KF 87	4						
14	1428	102.71	1.78	KA 87	4						
16	1201	86.34	2.1	KAF87	4						
18	1103	79.34	2.3								
20	980	70.46	2.6								
23	876	63.00	2.9								
13	1579	113.56	0.9								
15	1350	97.05	1.08								
16	1237	88.97	1.18								
18	1086	78.07	1.34								
19	1029	73.99	1.42	K 77	4						
22	901	64.75	1.62	KF 77	4						
24	811	58.34	1.80	KA 77	4						
28	712	51.18	2.0	KAF77	4						
31	628	45.16	2.3								
35	557	40.04	2.6								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p
3.0kW						3.0kW					
0.46	54983	3062	0.85	K 187R97 KA 187R97	4	10	2692	141.93	2.8	K 107	4
0.5	50602	2818	0.93			12	2268	119.58	3.3	KF 107	4
0.56	45233	2519	1.04							KA 107	4
0.63	40726	2268	1.15							KAF107	4
0.69	36883	2054	1.27			7.7	3496	124.61	1.16	K 97	6
0.78	32699	1821	1.44			9.3	2911	103.78	1.39	KF 97	6
0.88	28820	1605	1.63			9.9	2716	96.80	1.49	KA 97	6
1.0	25050	1395	1.88			11	2427	86.52	1.67	KAF97	6
1.2	21476	1196	2.2								
0.84	30490	1698	0.99	K 167R97 KF 167R97 KA 167R97 KAF167R97	4	8.1	3328	175.47	1.21	K 97 KF 97 KA 97 KAF97	4
1.0	25175	1402	1.2			9.3	2889	152.31	1.40		
1.1	23182	1291	1.3			10	2660	140.28	1.52		
1.3	19770	1101	1.52			11	2363	124.61	1.71		
1.5	16951	944	1.77			14	1968	103.78	2.05		
1.7	15137	843	1.99			15	1836	96.80	2.20		
1.9	13593	757	2.2			16	1646	86.52	2.46		
						18	1477	77.89	2.74		
1.2	22069	1229	0.77	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	20	1338	70.54	3.02	K 87 KF 87 KA 87 KAF87	4
1.3	19627	1093	0.86			23	1186	62.55	3.41		
1.5	16915	942	1.00			25	1072	56.55	3.77		
1.7	15335	854	1.10			9.6	2790	147.09	0.91		
1.9	13575	756	1.25			11	2403	126.68	1.06		
2.5	10146	565	1.67			12	2184	115.16	1.16		
2.8	9032	503	1.87			14	1948	102.71	1.30		
						16	1637	86.34	1.55		
2.6	9625	536	1.27	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	18	1505	79.34	1.69		
3.0	8494	473	1.44			20	1336	70.46	1.90		
3.4	7506	418	1.63			23	1195	63.00	2.1		
3.9	6590	367	1.85			25	1074	56.64	2.4		
4.3	5926	330	2.1			29	932	49.16	2.7		
4.9	5207	290	2.3			32	835	44.02	2.9		
						39	693	36.52	3.4		
1.8	14186	790	0.86	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	16	1687	88.97	0.86	K 77 KF 77 KA 77 KAF77	4
2.1	12390	690	0.99			18	1481	78.07	0.98		
2.4	10756	599	1.14			19	1403	73.99	1.04		
2.6	9679	539	1.26			22	1228	64.75	1.19		
3.0	8404	468	1.45			24	1106	58.34	1.32		
3.5	7362	410	1.66			28	971	51.18	1.50		
						31	856	45.16	1.70		
3.1	8170	455	0.92	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	35	759	40.04	1.92		
3.5	7219	402	1.04			40	668	35.20	2.2		
4.0	6303	351	1.19			46	586	30.89	2.5		
4.6	5513	307	1.36			32	841	44.32	0.92	K 67 KF 67 KA 67 KAF67	4
5.1	4974	277	1.51			37	728	38.39	1.06		
5.8	4363	243	1.72			40	676	35.62	1.14		
6.6	3861	215	1.95			47	573	30.22	1.34		
7.5	3394	189	2.2			52	517	27.28	1.49		
8.5	3017	168	2.5			59	455	24.00	1.65		
9.5	2676	149	2.8			63	430	22.66	1.71		
10	2496	139	3.0			74	366	19.30	1.95		
5.5	4893	258	0.83	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	81	333	17.54	2.1		
6.1	4400	232	0.92			93	288	15.19	2.3		
7.1	3774	199	1.07			107	251	13.22	2.5		
						116	232	12.24	2.1		
5.0	5366	141.46	1.40	K 107 KF 107 KA 107 KAF107	8	136	198	10.42	2.4		
5.9	4543	119.76	1.66			150	180	9.47	2.5		
6.4	4204	110.83	1.79			47	574	30.28	0.98	K 57 KF 57 KA 57 KAF57	4
7.1	3768	99.34	2.0			52	519	27.34	1.09		
7.9	3402	89.68	2.2			59	456	24.05	1.24		
						63	431	22.71	1.31		
6.8	3968	141.46	1.9			73	367	19.34	1.47		
8.0	3360	119.76	2.2			81	333	17.57	1.57		
8.7	3109	110.83	2.4								
9.7	2787	99.34	2.7								

K



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
3.0kW						4.0kW					
93	289	15.22	1.74	K 57 KF 57 KA 57 KAF57	4	4.0	8404	351	0.89	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
107	251	13.25	1.9			4.6	7350	307	1.02		
119	226	11.92	1.7			5.1	6632	277	1.13		
126	214	11.26	1.8			5.8	5818	243	1.29		
148	182	9.59	2.1			6.6	5148	215	1.46		
163	165	8.71	2.2			7.5	4525	189	1.66		
188	143	7.55	2.4			8.5	4022	168	1.68		
216	125	6.57	2.6	9.5	3567	149	1.9				
						11	3232	135	2.1		
73	371	19.58	1.01	K 47 KF 47 KA 47 KAF47	4	7.1	5032	199	0.80	K 97R57	4
84	320	16.86	1.12							KF 97R57	4
90	301	15.86	1.19							KA 97R57	4
104	259	13.65	1.31							KAF97R57	4
116	231	12.19	1.42			K 127 KF 127 KA 127 KAF127	8				
121	223	11.77	1.18					127	8		
134	200	10.56	1.31					KF 127	8		
156	173	9.1	1.53					KA 127	8		
166	162	8.56	1.56					KAF127	8		
193	140	7.36	1.68					K 127 KF 127 KA 127 KAF127	6		
216	125	6.58	1.81							127	6
244	110	5.81	1.96	KF 127	6						
				KA 127	6						
159	169	8.91	0.89	K 37	4						
178	151	7.96	0.97	KF 37	4						
209	129	6.8	1.09	KA 37	4						
223	121	6.37	1.13	KAF37	4						
265	102	5.36	1.29			6.4	5605	110.83	1.34	K 107	8
4.0kW						7.1	5024	99.34	1.50	KF 107	8
1.7	19697	825	2.4	K 187R107	4	7.9	4536	89.68	1.66	KA 107	8
2.8	12272	514	3.8	KA 187R107	4	8.7	4120	81.46	1.83	KAF107	8
0.57	59473	2510	0.79	K 187R97 KA 187R97	4	6.8	5309	141.93	1.42	K 107 KF 107 KA 107 KAF107	6
0.63	53547	2268	0.88			8.0	4473	119.58	1.68		
0.70	48494	2054	0.97			8.7	4146	110.83	1.81		
0.79	42993	1821	1.09			9.7	3716	99.34	2.0		
0.90	37894	1605	1.24			11	3354	89.68	2.2		
1.0	32936	1395	1.43			10	3527	141.46	2.1	K 107 KF 107 KA 107 KAF107	4
1.2	28237	1196	1.66			12	2986	119.76	2.5		
1.4	24696	1046	1.90			13	2764	110.83	2.7		
1.5	22240	942	2.1			14	2477	99.34	3.0		
				16	2236	89.68	3.4				
1.0	33101	1402	0.91	18	2031	81.46	3.7	K 97 KF 97 KA 97 KAF97	4		
1.1	30480	1291	0.99	20	1802	72.27	4.2				
1.3	25994	1101	1.16	10	3498	140.28	1.16				
1.5	22288	944	1.35	12	3107	124.61	1.30				
1.7	19903	843	1.51	14	2588	103.78	1.56				
1.9	17873	757	1.68	15	2414	96.80	1.67	K 87 KF 87 KA 87 KAF87	4		
2.3	14874	630	2.0	17	2157	86.52	1.87				
				18	1942	77.89	2.1				
1.7	20163	854	0.84	20	1759	70.54	2.3				
1.9	17849	756	0.95	13	2872	115.16	0.88				
2.5	13339	565	1.27	K 157R97	4	14	2561	102.71	0.99	K 87 KF 87 KA 87 KAF87	4
2.9	11876	503	1.42	KF 157R97	4	17	2153	86.34	1.18		
3.3	10223	433	1.66	KA 157R97	4	18	1978	79.34	1.28		
				KAF157R97	4	20	1757	70.46	1.44		
2.7	12655	536	0.97	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	23	1571	63.00	1.62		
3.0	11167	473	1.09			25	1412	56.64	1.80		
3.4	9869	418	1.24			29	1226	49.16	2.1		
3.9	8665	367	1.41			33	1098	44.02	2.3		
4.3	7901	330	1.55			39	911	36.52	2.8		
4.9	6943	290	1.76								
5.6	6057	253	2.0								
2.4	14341	599	0.85	K 127R77	4						
2.6	12905	539	0.95	KF 127R77	4						
3.0	11205	468	1.09	KA 127R77	4						
3.5	9816	410	1.24	KAF127R77	4						



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
4.0kW						5.5kW					
22	1615	64.75	0.90	K 77 KF 77 KA 77 KAF77	4	3.4	13570	418	0.90	K 127R87 KF 127R87 KA 127R87 KAF127R87	4
25	1455	58.34	1.00			3.9	11914	367	1.03		
28	1276	51.18	1.14			4.4	10713	330	1.14		
32	1126	45.16	1.29			5.0	9414	290	1.30		
36	998	40.04	1.46			5.7	8213	253	1.49		
38	957	38.39	1.52			6.7	6980	215	1.75		
41	878	35.20	1.66			7.1	6590	203	1.71		
47	770	30.89	1.89			8.6	5454	168	2.1		
49	730	29.27	2.0			9.7	4805	148	2.3		
56	639	25.62	2.3								
62	576	23.08	2.5								
71	505	20.25	2.9								
48	754	30.22	1.02	K 67 KF 67 KA 67 KAF67	4	6.7	6980	215	1.08	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
53	680	27.28	1.13			7.6	6136	189	1.23		
60	598	24.00	1.26			8.6	5454	168	1.38		
64	565	22.66	1.30			9.7	4837	149	1.55		
75	481	19.30	1.48			11	4383	135	1.72		
82	437	17.54	1.59			4.8	10288	150.03	1.64	K 157 KF 157 KA 157 KAF157	8
95	379	15.19	1.74			5.9	8423	122.83	2.0		
109	330	13.22	1.91			7.2	6833	99.65	2.5		
118	305	12.24	1.63			7.8	6338	92.42	2.7		
138	260	10.42	1.81			5.3	9253	134.94	1.3	K 127 KF 127 KA 127 KAF127	8
152	236	9.47	1.91			5.9	8399	122.60	1.5		
176	204	8.20	2.02	6.5	7556	110.13	1.6				
202	178	7.14	2.2	8.1	6143	89.43	2.0				
60	600	24.05	0.94	K 57 KF 57 KA 57 KAF57	4	7.1	6940	134.94	1.76	K 127 KF 127 KA 127 KAF127	6
63	566	22.71	1.00			7.8	6299	122.60	1.94		
74	482	19.34	1.12			8.7	5667	110.13	2.2		
82	438	17.57	1.19			11	4599	89.43	2.7		
95	380	15.22	1.33			8.7	5700	110.83	1.32	K 107 KF 107 KA 107 KAF107	6
109	330	13.25	1.45			9.7	5109	99.34	1.47		
121	297	11.92	1.31			11	4612	89.68	1.63		
128	281	11.26	1.39			12	4190	81.46	1.79		
150	239	9.59	1.59			10	4866	141.93	1.55	K 107 KF 107 KA 107 KAF107	4
165	217	8.71	1.69			12	4100	119.58	1.83		
191	188	7.55	1.82			13	3800	110.83	1.98		
219	164	6.57	1.98	14	3406	99.34	2.2				
				16	3075	89.68	2.4				
				18	2793	81.46	2.7				
0.79	59116	1821	0.80	K 187R97 KA 187R97	4	12	4273	124.61	0.95	K 97 KF 97 KA 97 KAF97	4
0.90	52104	1605	0.90			14	3558	103.78	1.1		
1.0	45286	1395	1.04			15	3319	96.80	1.2		
1.2	38826	1196	1.21			17	2967	86.52	1.35		
1.4	33957	1046	1.38			18	2671	77.89	1.5		
1.5	30580	942	1.54			20	2419	70.54	1.65		
2.0	23926	737	2.0			23	2145	62.55	1.85		
2.3	20095	619	2.3			25	1939	56.55	2.1		
1.31	35742	1101	0.84	30	1643	47.93	2.4				
1.5	30645	944	0.98	17	2960	86.34	0.85	K 87 KF 87 KA 87 KAF87	4		
1.7	27367	843	1.10	18	2720	79.34	0.95				
1.9	24575	757	1.22	20	2416	70.46	1.05				
2.3	20452	630	1.47	23	2160	63.00	1.15				
2.6	18212	561	1.65	25	1942	56.64	1.3				
3.0	15550	479	1.93	29	1686	49.16	1.5				
3.4	13700	422	2.2	33	1509	44.02	1.6				
				39	1252	36.52	1.85				
				46	1076	31.39	2.3				
				52	956	27.88	2.5				
2.2	21458	661	0.79	32	1548	45.16	0.94			K 77 KF 77 KA 77 KAF77	4
2.5	18342	565	0.92	36	1373	40.04	1.06				
2.9	16329	503	1.04	47	1059	30.89	1.38				
3.3	14057	433	1.20	49	1004	29.27	1.45				
3.8	12271	378	1.38	56	878	25.62	1.66				
4.3	10778	332	1.57								



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数					
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole					
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p					
5.5kW						7.5kW										
62	791	23.08	1.84	K 77 KF 77 KA 77 KAF77	4	6.4	10522	150.03	1.6	K 157 KF 157 KA 157 KAF157	6					
71	694	20.25	2.0			7.8	8614	122.83	2.0							
81	613	17.87	2.2			9.6	6989	99.65	2.4							
91	543	15.84	2.4			10	6482	92.42	2.6							
107	464	13.52	2.5			12	5593	79.75	3.0							
117	424	12.36	2.6			7.1 9464 134.94 1.29 K 127 6 7.8 8590 122.48 1.42 KF 127 6 8.7 7727 110.18 1.58 KA 127 6 11 6272 89.43 1.95 KAF127 6										
133	371	10.81	2.7	10 6736 146.07 1.81 K 127 4 11 6223 134.94 1.96 KF 127 4 12 5648 122.60 2.2 KA 127 4 13 5081 110.13 2.4 KAF127 4 16 4124 89.43 3.0 18 3805 82.52 3.2 21 3272 70.95 3.7												
60	823	24.00	0.91	10 6545 141.93 1.15 K 107 4 12 5514 119.58 1.36 KF 107 4 13 5111 110.83 1.47 KA 107 4 15 4581 99.34 1.64 KAF107 4 16 4136 89.68 1.82 18 3757 81.46 2.00 20 3333 72.27 2.3 22 3024 65.58 2.5 26 2599 56.37 2.9 30 2269 49.20 3.2 35 1925 41.74 3.6 40 1682 36.48 4.0												
64	777	22.66	0.94		15 4464 96.80 0.91 K 97 4 17 3990 86.52 1.01 KF 97 4 19 3592 77.89 1.13 KA 97 4 21 3253 70.54 1.24 KAF97 4 23 2884 62.55 1.40 26 2608 56.55 1.55 30 2210 47.93 1.83 35 1931 41.87 2.1 38 1766 38.30 2.3 43 1579 34.23 2.6											
75	662	19.30	1.08		23 2905 63.00 0.87 K 87 4 26 2612 56.64 0.97 KF 87 4 30 2267 49.16 1.12 KA 87 4 33 2030 44.02 1.20 KAF87 4 40 1684 36.52 1.40 47 1448 31.39 1.75 52 1286 27.88 1.90 59 1149 24.92 2.0 65 1033 22.41 2.1 75 897 19.45 2.4 84 803 17.42 2.6 92 736 15.95 2.3 101 666 14.45 3.0											
82	601	17.54	1.16				47 1424 30.89 1.02 K 77 4 50 1350 29.27 1.08 KF 77 4 57 1181 25.62 1.23 KA 77 4 63 1064 23.08 1.37 KAF77 4 72 934 20.25 1.56 82 824 17.87 1.65 92 730 15.84 1.80 108 623 13.52 1.82 118 570 12.36 1.89 135 499 10.81 1.95 153 440 9.54 2.0 173 390 8.46 2.1 202 333 7.22 2.3									
95	521	15.19	1.26			4.4 15382 164.44 2.0 K 167 8 5.3 12623 135.38 2.4 KA 167 8 5.8 11537 164.44 2.61 K 167 6 7.1 9467 135.38 3.18 KA 167 6										
109	453	13.22	1.39					4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89								
118	420	12.24	1.39						3.4 18906 433 0.89 K 157R97 4 3.9 16504 378 1.03 KF 157R97 4 4.4 14496 332 1.17 KA 157R97 4 5.0 12662 290 1.34 KAF157R97 4							
138	357	10.42	1.32							4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89						
152	325	9.47	1.39								4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89					
176	281	8.20	1.47									4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89				
202	245	7.14	1.61										4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89			
82	602	17.57	0.87											4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89		
95	522	15.22	0.96	4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89												
109	454	13.25	0.97												4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89	
121	409	11.92	1.01		4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89											
128	386	11.26	1.06				4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89									
150	329	9.59	1.16			4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89										
165	299	8.71	1.23					4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89								
191	259	7.55	1.33						4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89							
219	225	6.57	1.44							4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89						
7.5kW											4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89					
1.8	36021	825	1.30									4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89				
2.0	31437	720	1.50										4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89			
2.4	26808	614	1.75											4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89		
1.2	52220	1196	0.90	4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89												
1.4	45670	1046	1.03												4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89	
1.5	41129	942	1.14		4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89											
2.0	32179	737	1.46				4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89									
2.4	27027	619	1.74			4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89										
2.8	22879	524	2.1					4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89								
1.7	36807	843	0.82						4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89							
1.9	33052	757	0.91							4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89						
2.3	27507	630	1.09								4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89					
2.6	24494	561	1.23									4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89				
3.0	20914	479	1.44										4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89			
3.5	18425	422	1.63											4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89		
4.0	16024	367	1.88	4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89												
3.4	18906	433	0.89												4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89	
3.9	16504	378	1.03		4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89											
4.4	14496	332	1.17				4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89									
5.0	12662	290	1.34			4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89										
4.4	14408	330	0.85					4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89								
5.0	12662	290	0.97						4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89							
5.8	11046	253	1.11							4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89						
6.8	9387	215	1.30								4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89					
7.2	8863	203	1.38									4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89				
8.7	7335	168	1.67										4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89			
9.9	6462	148	1.89											4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89		
4.4	15382	164.44	2.0	4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89												
5.3	12623	135.38	2.4												4.4 14408 330 0.85 K 127R87 4 5.0 12662 290 0.97 KF 127R87 4 5.8 11046 253 1.11 KA 127R87 4 6.8 9387 215 1.30 KAF127R87 4 7.2 8863 203 1.38 8.7 7335 168 1.67 9.9 6462 148 1.89	
5.8																



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
11kW						11kW					
1.8	52831	825	0.89	K 187R107 KA 187R107	4	20	4888	72.27	1.54	K 107 KF 107 KA 107 KAF107	4
2.0	46107	720	1.02			22	4435	65.58	1.70		
2.4	39319	614	1.20			26	3813	56.37	1.97		
2.8	32915	514	1.43			30	3328	49.2	2.2		
3.3	28753	449	1.63			35	2823	41.74	2.5		
4.0	23374	365	2.0			40	2467	36.48	2.7		
2.0	47196	737	1.00	K 187R97	4	21	4771	70.54	0.85	K 97 KF 97 KA 97 KAF97	4
2.4	39639	619	1.19	KA 187R97	4	23	4231	62.55	0.96		
2.8	33556	524	1.40			26	3825	56.55	1.06		
4.7	20044	313	1.50			30	3242	47.93	1.25		
5.3	17482	273	1.72	K 167R107	4	35	2832	41.87	1.43		
5.8	16009	250	1.88	KA 167R107	4	38	2590	38.3	1.56		
6.7	13960	218	2.2			43	2315	34.23	1.75	K 87 KF 87 KA 87 KAF87	4
7.2	13000	203	2.3			47	2085	30.82	1.94		
2.6	35925	561	0.84			52	1888	27.91	2.1		
3.0	30674	479	0.98	K 167R97	4	59	1674	24.75	2.4		
3.5	27024	422	1.11	KA 167R97	4	65	1513	22.37	2.7		
4.0	23502	367	1.28			33	2977	44.02	0.82		
4.4	21260	332	0.80	K 157R97	4	40	2470	36.52	0.95		
5.0	18571	290	0.91	KF 157R97	4	47	2123	31.39	1.20		
				KA 157R97	4	52	1886	27.88	1.30		
				KAF157R97	4	59	1685	24.92	1.39		
6.8	13768	215	0.89	K 127R87	4	65	1516	22.41	1.43		
7.2	13000	203	0.94	KF 127R87	4	75	1315	19.45	1.64		
8.7	10758	168	1.14	KA 127R87	4	84	1178	17.42	1.76		
9.9	9478	148	1.29	KAF127R87	4	92	1079	15.95	1.57		
						101	977	14.45	1.9		
5.4	18313	135.38	1.64	K 167	8	116	849	12.56	2.0		
6.6	14932	110.38	2.0	KA 167	8	131	753	11.13	2.1		
						147	674	9.96	2.2		
						177	559	8.27	2.4		
						203	486	7.19	2.5		
5.9	16740	164.44	1.80	K 167	6	63	1561	23.08	0.93	K 77 KF 77 KA 77 KAF77	4
7.2	13782	135.38	2.2	KA 167	6	72	1370	20.25	1.03		
8.9	11122	164.44	2.7	K 167	4	82	1209	17.87	1.13		
11	9158	135.38	3.3	KA 167	4	92	1071	15.84	1.23		
						108	914	13.52	1.38		
						118	836	12.36	1.12		
5.9	16615	122.83	1.02	K 157	8	135	731	10.81	1.27	K 167R107 KA 167R107	4
7.3	13480	99.65	1.26	KF 157	8	153	645	9.54	1.37		
7.9	12502	92.42	1.35	KA 157	8	173	572	8.46	1.46		
9.1	10788	79.75	1.57	KAF157	8	202	488	7.22	1.57		
6.5	15273	150.03	1.11	K 157	6	15kW					
7.9	12504	122.83	1.35	KF 157	6	2.4	53617	614	0.88	K 187R107 KA 187R107	4
9.7	10144	99.65	1.67	KA 157	6	2.8	44884	514	1.05		
10	9408	92.42	1.80	KAF157	6	3.3	39208	449	1.20		
12	8119	79.75	2.1			4.0	31873	365	1.47		
						5.4	23403	268	2.0		
9.7	10147	150.03	1.67	K 157	4	4.7	27332	313	1.10	K 167R107 KA 167R107	4
12	8308	122.83	2.0	KF 157	4	5.3	23839	273	1.26		
15	6740	99.65	2.5	KA 157	4	5.8	21831	250	1.38		
16	6251	92.42	2.7	KAF157	4	6.7	19037	218	1.58		
						7.2	17727	203	1.70		
11	9127	134.94	1.34			7.9	16155	185	1.86		
12	8295	122.60	1.47	K 127	4	9.0	14234	163	2.1		
13	7449	110.13	1.64	KF 127	4						
16	6049	89.43	2.0	KA 127	4						
18	5581	82.52	2.2	KAF127	4						
21	4799	70.95	2.5			6.2	20696	237	0.82	K 157R107 KF 157R107 KA 157R107 KAF157R107	4
						7.0	18338	210	0.92		
13	7496	110.83	1.00	K 107	4	7.9	16068	184	1.05		
15	6719	99.34	1.12	KF 107	4	9.4	13535	155	1.25		
16	6066	89.68	1.24	KA 107	4	12	11003	126	1.54		
18	5510	81.46	1.36	KAF107	4	13	9606	110	1.76		



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
15kW						18.5kW					
5.4	25096	180.78	1.87	K 187	6	2.9	54981	514	0.85	K 187R107	4
6.0	22285	160.53	2.1	KA 187	6	3.3	48028	449	0.98		
7.2	18793	135.38	1.60	K 167	6	4.0	39043	365	1.20		
8.8	15324	110.39	1.96	KA 167	6	5.5	28667	268	1.64		
						6.5	24281	227	1.9		
8.9	15166	164.44	1.12	K 167	4	4.7	33481	313	0.90	K 167R107	4
11	12486	135.38	1.36	KA 167	4	5.4	29202	273	1.03		
7.9	16990	122.39	1.00	K 157	6	5.9	26742	250	1.12		
9.7	13833	99.65	1.22	KF 157	6	6.7	23319	218	1.29		
10	12830	92.42	1.32	KA 157	6	7.2	21714	203	1.39		
12	11071	79.75	1.53	KAF157	6	7.9	19789	185	1.52	K 157R107	4
14	9770	70.35	1.73			9.0	17436	163	1.73		
9.7	13837	150.03	1.22	K 157	4	11	14868	139	2.0		
12	11329	122.83	1.49	KF 157	4	12	12943	121	2.3		
15	9191	99.65	1.84	KA 157	4	8.0	19682	184	0.86		
16	8524	92.42	2.0	KAF157	4	9.5	16580	155	1.02	KF 157R107	4
18	7355	79.75	2.3			12	13478	126	1.26	KA 157R107	4
11	12445	134.94	0.97	K 127	4	13	11766	110	1.44	KAF157R107	4
12	11307	122.60	1.08			5.4	30951	180.78	1.52	K 187	6
13	10157	110.13	1.20			6.0	27484	160.53	1.71		
16	8248	89.43	1.48			6.7	24745	144.53	1.9		
18	7611	82.52	1.61			7.4	22317	130.35	2.1		
21	6544	70.95	1.87	KA 127	4	8.1	20424	180.78	2.3	K 187	4
23	5774	62.60	2.1	KAF127	4	9.2	18136	160.53	2.6		
27	4987	54.07	2.5			10	16328	144.53	2.9		
31	4410	47.82	2.8			11	14726	130.35	3.2		
16	8271	89.68	0.91	K 107	4	11	15195	134.5	1.98	K 167	4
18	7513	81.46	1.00			13	12471	110.39	2.4		
20	6665	72.27	1.13			17	9851	87.20	3.1		
22	6048	65.58	1.24			10	17061	99.65	0.99		
26	5199	56.37	1.45			11	15823	92.42	1.08	KF 157	6
30	4538	49.2	1.62	KF 107	4	12	13654	79.75	1.24	KA 157	6
35	3850	41.74	1.80	KA 107	4	14	12050	70.38	1.4	KAF157	6
40	3365	36.48	2.0	KAF107	4	12	13827	122.39	1.22	K 157	4
45	2972	32.22	2.2			15	11258	99.65	1.50		
47	2844	30.84	2.3			16	10441	92.42	1.62		
51	2637	28.59	2.6			18	9010	79.75	1.88		
30	4421	47.93	0.91	K 97	4	21	7951	70.38	2.1		
35	3862	41.87	1.05			24	6894	61.02	2.5	KAF157	4
38	3532	38.3	1.14			27	6133	54.29	2.8	K 127	4
43	3157	34.23	1.28			31	5286	46.79	3.2		
47	2843	30.82	1.42	KF 97	4	39	4295	38.02	3.9		
52	2574	27.91	1.57	KA 97	4	13	12442	110.13	0.98		
59	2283	24.75	1.77	KAF97	4	16	10103	89.43	1.21	K 107	4
65	2063	22.37	1.96			18	9323	82.52	1.31		
77	1749	18.96	2.3			21	8016	70.95	1.52		
88	1527	16.56	2.6			23	7072	62.60	1.73		
47	2895	31.39	0.88	K 87	4	27	6109	54.07	2.0		
52	2571	27.88	0.99			31	5403	47.82	2.3	KA 127	4
59	2298	24.92	1.10			37	4540	40.19	2.7	K 107	4
65	2067	22.41	1.23			41	4121	36.48	3.0		
75	1794	19.45	1.37			47	3544	31.36	3.4		
84	1607	17.42	1.41	KF 87	4	53	3127	27.67	3.9		
92	1471	15.95	1.48	KA 87	4	20	8165	72.27	0.92	K 107	4
101	1333	14.45	1.5	KAF87	4	22	7409	65.58	1.01		
116	1158	12.56	1.53			26	6368	56.37	1.18		
131	1027	11.13	1.58			30	5558	49.2	1.35		
147	919	9.96	1.73			35	4716	41.74	1.47		
177	763	8.27	1.84			40	4121	36.48	1.64	KA 107	4
203	663	7.19	2.2								



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _s	Type	p	r/min	Nm	i	f _s	Type	p		
18.5kW						22kW							
46	3640	32.22	1.86	K 107 KF 107 KA 107 KAF107	4	9.7	20289	99.65	0.83	K 157	6		
48	3484	30.84	1.88			11	18817	92.42	0.90	KF 157	6		
51	3230	28.59	2.1			12	16237	79.75	1.04	KA 157	6		
57	2931	25.94	2.3			14	14330	70.38	1.18	KAF157	6		
66	2519	22.30	2.7			16	12424	61.02	1.36				
76	2199	19.46	3.1										
89	1865	16.51	3.6										
35	4730	41.87	0.85	K 97 KF 97 KA 97 KAF97	4	12	16502	122.83	1.03	K 157 KF 157 KA 157 KAF157	4		
48	3482	30.82	1.16			15	13388	99.65	1.26				
53	3153	27.91	1.28			16	12417	92.42	1.36				
59	2796	24.75	1.45			18	10714	79.75	1.58				
66	2527	22.37	1.60			21	9456	70.38	1.79				
78	2142	18.96	1.9			24	8198	61.02	2.1				
89	1871	16.56	2.2			27	7294	54.29	2.3				
106	1565	13.85	2.6			31	6286	46.79	2.7				
123	1355	11.99	2.7			39	5108	38.02	3.3				
59	2815	24.92	0.83			K 87 KF 87 KA 87 KAF87	4	16	12015			89.43	1.02
66	2532	22.41	0.85	18	11087			82.52	1.10				
76	2197	19.45	0.98	21	9532			70.95	1.28				
84	1968	17.42	1.05	23	8410			62.60	1.45				
102	1633	14.45	1.12	27	7264			54.07	1.68				
117	1419	12.56	1.21	31	6425			47.82	1.90				
132	1257	11.13	1.25	37	5400			40.19	2.3				
148	1125	9.96	1.32	40	4901			36.48	2.5				
178	934	8.27	1.41	47	4215			31.36	2.9				
204	812	7.19	1.50	53	3719			27.67	3.3				
				61	3212			23.90	3.8				
				70	2841			21.14	4.3				
22kW								22kW					
3.3	57114	449	0.82	K 187R107 KA 187R107	4	26	7573	56.37	0.99	K 107 KF 107 KA 107 KAF107	4		
4.0	46429	365	1.01			30	6610	49.20	1.11				
5.5	34091	268	1.38			35	5608	41.74	1.23				
6.5	28875	227	1.63			40	4901	36.48	1.38				
7.4	25313	199	1.86			46	4329	32.22	1.56				
8.8	21370	168	2.2			48	4143	30.84	1.54				
5.4	34727	273	0.87	K 167R107 KA 167R107	4	51	3841	28.59	1.76	K 97 KF 97 KA 97 KAF97	4		
5.9	31801	250	0.95			57	3485	25.94	1.94				
6.7	27730	218	1.08			66	2996	22.30	2.2				
7.2	25822	203	1.16			76	2614	19.46	2.3				
7.9	23533	185	1.28			89	2218	16.51	2.6				
9.0	20734	163	1.45			102	1939	14.43	2.6				
11	17681	139	1.70			109	1815	13.51	2.9				
12	15392	121	2.0			125	1584	11.79	3.0				
9.5	19717	155	0.86			147	1343	10	3.3			K 187 KF 187 KA 187 KAF187	6
12	16028	126	1.06			48	4141	30.82	0.98				
13	13992	110	1.21	53	3750	27.91	1.08						
5.4	36807	180.78	1.28	59	3325	24.75	1.22						
6.0	32684	160.53	1.44	66	3005	22.37	1.34						
6.7	29427	144.53	1.60	78	2547	18.96	1.59						
7.4	26540	130.35	1.77	89	2225	16.56	1.82						
8.6	23044	113.18	2.0	106	1861	13.85	1.87						
8.1	24288	180.78	1.94	K 187 KA 187	4	123	1611	11.99	2.1	K 87 KF 87 KA 87 KAF87	4		
9.2	21567	160.53	2.2			137	1439	10.71	2.2				
10	19418	144.53	2.4			164	1202	8.95	2.3				
11	17512	130.35	2.7			76	2613	19.45	0.83				
11	18070	134.5	1.66			84	2340	17.42	0.88				
13	14831	110.39	2.0	K 167 KA 167	4	102	1941	14.45	0.94	K 157 KF 157 KA 157 KAF157	4		
17	11715	87.20	2.6			117	1687	12.56	1.02				
19	10460	77.86	2.9			132	1495	11.13	1.05				
						148	1338	9.96	1.11				
						178	1111	8.27	1.18				
						204	966	7.19	1.27				



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_B	机 型 号 Type Type	极 数 Pole p
30kW						37kW					
5.5	49099	268	0.96	K 187R107 KA 187R107	4	5.5	56947	268	0.83	K 187R107 KA 187R107	4
6.5	41587	227	1.13			6.5	48235	227	0.97		
7.4	36458	199	1.29			7.4	42285	199	1.11		
8.8	30778	168	1.5			8.8	35698	168	1.32		
6.7	39938	218	0.75	K 167R107 KA 167R107	4	8.0	39310	185	0.77	K 167R107 KA 167R107	4
7.2	37190	203	0.81			9.1	34635	163	0.87		
7.9	33893	185	0.89			11	29536	139	1.02		
9.0	29862	163	1.01			12	25711	121	1.17		
11	25465	139	1.18			8.2	40572	180.78	1.16	K 187 KA 187	4
12	22168	121	1.36			8.9	37268	166.06	1.26		
8.1	33120	180.78	1.42	K 187 KA 187	4	10	32436	144.53	1.45		
8.9	30423	166.06	1.54			11	29395	130.98	1.60		
10	26478	144.53	1.78			13	25400	113.18	1.85		
11	23996	130.98	1.96			14	23046	102.69	2.0	K 167 KA 167	4
13	20735	113.18	2.3			17	19853	88.46	2.4		
14	18813	102.69	2.5	K 167 KA 167	4	14	24559	109.43	1.22		
17	16206	88.46	2.9			17	19646	87.54	1.53		
13	20048	109.43	1.50			19	17828	78.44	1.69		
17	15975	87.20	1.88			22	15301	68.18	2.0		
19	14554	79.44	2.1			24	13582	60.52	2.2	K 157 KF 157 KA 157 KAF157	4
22	12427	67.83	2.4	K 157 KF 157 KA 157 KAF157	4	35	9592	42.74	3.1		
24	11088	60.52	2.7			16	20741	92.42	0.82		
15	18256	99.65	0.93			19	17898	79.75	0.95		
16	16932	92.42	1.00			21	15795	70.38	1.07		
18	14611	79.75	1.16	K 127 KF 127 KA 127 KAF127	4	24	13694	61.02	1.24	K 127 KF 127 KA 127 KAF127	4
21	12894	70.38	1.31			27	12184	54.29	1.39		
24	11179	61.02	1.51			32	10501	46.79	1.61		
27	9946	54.29	1.70			39	8533	38.02	1.98		
31	8572	46.79	1.97			47	7025	31.30	2.4		
39	6965	38.02	2.4	K 127 KF 127 KA 127 KAF127	4	24	14049	62.60	0.87	K 107 KF 107 KA 107 KAF107	4
47	5734	31.30	3.0			27	12135	54.07	1.01		
21	12998	70.95	0.94			31	10732	47.82	1.14		
23	11469	62.60	1.07			37	9020	40.19	1.35		
27	9906	54.07	1.23			41	8187	36.48	1.49		
31	8761	47.82	1.39	K 107 KF 107 KA 107 KAF107	4	47	7040	31.36	1.74	K 107 KF 107 KA 107 KAF107	4
37	7363	40.19	1.66			53	6212	27.67	1.97		
40	6683	36.48	1.83			62	5366	23.90	2.3		
47	5747	31.36	2.1			70	4747	21.14	2.6		
53	5071	27.67	2.4			83	3988	17.77	2.8	K 97 KF 97 KA 97 KAF97	4
61	4380	23.90	2.8	K 107 KF 107 KA 107 KAF107	4	103	3220	14.35	3.1		
35	7647	41.74	0.90			116	2870	12.78	3.1		
40	6683	36.48	1.01			138	2410	10.74	3.5		
46	5903	32.22	1.08			171	1948	8.68	3.5		
51	5238	28.59	1.29	K 97 KF 97 KA 97 KAF97	4	41	8187	36.48	0.83	K 97 KF 97 KA 97 KAF97	4
57	4752	25.94	1.42			48	6921	30.84	0.92		
66	4085	22.30	1.63			52	6416	28.59	1.05		
76	3565	19.46	1.66			57	5822	25.94	1.16		
89	3025	16.51	1.87			66	5005	22.3	1.33		
102	2644	14.43	1.90	K 97 KF 97 KA 97 KAF97	4	76	4367	19.46	1.35		
109	2475	13.51	2.15			90	3705	16.51	1.53		
125	2160	11.79	2.19			103	3238	14.43	1.55		
147	1832	10.00	2.39			110	3032	13.51	1.75		
168	1601	8.74	2.45			126	2646	11.79	1.79		
59	4534	24.75	0.89	K 97 KF 97 KA 97 KAF97	4	148	2244	10.00	1.82	K 97 KF 97 KA 97 KAF97	4
66	4098	22.37	0.99			169	1961	8.74	1.95		
78	3474	18.96	1.16								
89	3034	16.56	1.33								
106	2537	13.85	1.59								
123	2197	11.99	1.66	K 97 KF 97 KA 97 KAF97	4						
137	1962	10.71	1.37								
164	1640	8.95	1.52								



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
45kW						55kW					
6.5	58664	227	0.80	K 187R107 KA 187R107	4	17	29204	87.54	1.03	K 167 KA 167	4
7.4	51428	199	0.91		4	19	25974	77.86	1.16		
8.8	43416	168	1.08		4	22	22745	68.18	1.32		
11	35922	139	0.84	K 167R107	4	24	20263	60.74	1.48		
12	31270	121	0.96	KA 167R107	4	29	17207	51.58	1.75		
8.2	49344	180.78	0.95	K 187 KA 187	4	35	14258	42.74	2.1	K 157 KF 157 KA 157 KAF157	4
8.9	45326	166.06	1.04			41	12170	36.48	2.5		
10	39449	144.53	1.19			24	20357	61.02	0.83		
11	35751	130.98	1.31			27	18111	54.29	0.93		
13	30892	113.18	1.52			32	15609	46.79	1.08		
14	28029	102.69	1.68			39	12684	38.02	1.33		
17	24145	88.46	1.9			47	10442	31.30	1.62		
20	20291	74.34	2.3			54	9214	27.62	1.84		
14	29869	109.43	1.01	K 167 KA 167	4	62	7990	23.95	2.1	K 127 KF 127 KA 127 KAF127	4
17	23894	87.54	1.26			69	7109	21.31	2.4		
19	21683	79.44	1.42			81	6128	18.37	2.8		
22	18610	68.18	1.62			99	4977	14.92	3.4		
24	16519	60.52	1.82			117	4220	12.65	3.8		
29	14079	51.58	2.1			37	13408	40.19	0.91		
35	11666	42.74	2.6			47	10465	31.36	1.17		
21	19210	70.38	0.88	K 157 KF 157 KA 157 KAF157	4	53	9234	27.67	1.32	K 127 KF 127 KA 127 KAF127	4
24	16655	61.02	1.02			62	7976	23.90	1.53		
27	14818	54.29	1.14			70	7056	21.14	1.73		
32	12771	46.79	1.32			83	5928	17.77	2.06		
39	10378	38.02	1.63			103	4787	14.35	2.38		
47	8543	31.30	2.0			116	4267	12.78	1.88		
54	7539	27.62	2.2			138	3583	10.74	2.1		
62	6537	23.95	2.6			171	2896	8.68	2.3		
69	5817	21.31	2.9	75kW						K 187 KA 187	4
81	5014	18.37	3.4	11	59298	130.35	0.79				
31	13052	47.82	0.94	13	52224	114.80	0.90				
37	10970	40.19	1.11	14	47016	103.35	1.00				
41	9957	36.48	1.23	17	40242	88.46	1.17				
47	8562	31.36	1.43	20	33818	74.34	1.39				
53	7555	27.67	1.62	23	29283	64.37	1.61				
62	6526	23.90	1.87	28	24402	53.64	1.9				
70	5773	21.14	2.1	32	20803	45.73	2.3	K 167 KA 167	4		
83	4850	17.77	2.3	19	35420	77.86	0.85				
103	3917	14.35	2.5	22	30857	67.83	0.97				
116	3491	12.78	2.6	24	27531	60.52	1.09				
138	2931	10.74	2.8	29	23496	51.65	1.28				
171	2369	8.68	2.9	34	19598	43.08	1.53				
52	7804	28.59	0.87	41	16595	36.48	1.81				
57	7080	25.94	0.96	46	14616	32.13	2.1				
66	6087	22.30	1.10	52	13042	28.67	2.3				
76	5312	19.46	1.11	61	11114	24.43	2.7	K 157 KF 157 KA 157 KAF157	4		
90	4506	16.51	1.26	39	17296	38.02	0.98				
103	3939	14.43	1.44	47	14239	31.30	1.19				
110	3688	13.51	1.47	54	12565	27.62	1.35				
126	3218	11.79	1.55	62	10895	23.95	1.55				
148	2729	10.00	1.60	69	9694	21.31	1.75				
169	2386	8.74	1.64	81	8357	18.37	2.0				
55kW						99	6787			14.92	2.5
10	45904	145.33	1.02	K 187 KA 187	4	117	5755	12.65	2.9	K 127 KF 127 KA 127 KAF127	4
11	41371	130.98	1.14			47	14271	31.36	0.86		
13	36261	114.80	1.30			53	12592	27.67	0.97		
14	32436	102.69	1.45			62	10877	23.90	1.12		
17	29511	88.46	1.59			70	9621	21.14	1.27		
20	24800	74.34	1.90			83	8084	17.77	1.36		
23	21474	64.37	2.19			103	6528	14.35	1.51		
						114	5900	12.78	1.54		
						138	4886	10.74	1.72		
						171	3949	8.68	1.74		



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数				
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole				
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p				
90kW						132kW									
14	56058	102.69	0.84	K 187 KA 187	4	20	59121	74.34	0.79	K 187 KA 187	4				
16	51134	93.67	0.92			23	51192	64.37	0.92						
19	42242	77.38	1.11			28	42659	53.64	1.10						
23	35139	64.37	1.34			31	38499	48.41	1.22						
28	29282	53.64	1.61			34	34666	43.59	1.36						
31	26427	48.41	1.8			38	30841	38.78	1.52						
34	23796	43.59	2.0			45	26570	33.41	1.77						
38	21170	38.78	2.2	K 167 KA 167	4	53	22331	28.08	2.1	K 167 KA 167	4				
22	37028	67.83	0.81			61	19333	24.31	2.3						
24	33038	60.52	0.91			74	16112	20.26	2.6						
29	28157	51.58	1.07			86	13734	17.27	2.8						
35	23332	42.74	1.29			35	33990	42.74	0.88						
40	19953	36.55	1.51			41	29012	36.48	1.04						
45	17807	32.62	1.69			46	25942	32.62	1.16						
52	15651	28.67	1.92			54	22053	27.73	1.36						
61	13336	24.43	2.3			61	19429	24.43	1.55						
73	11054	20.25	2.7			74	16104	20.25	1.87						
86	9433	17.28	3.2			86	13742	17.28	2.2						
39	20755	38.02	0.82	K 157 KF 157 KA 157 KAF157	4	62	19047	23.95	0.89	K 157 KF 157 KA 157 KAF157	4				
47	17087	31.30	0.99			70	16947	21.31	1.00						
54	15078	27.62	1.12			81	14609	18.37	1.16						
62	13074	23.95	1.29			100	11866	14.92	1.43						
69	11633	21.31	1.45			118	10060	12.65	1.59						
81	10028	18.37	1.69			160kW									
99	8145	14.92	2.1			28	51708	53.64	0.91			K 187 KA 187	4		
117	6906	12.65	2.5			33	44082	45.73	1.07						
62	13052	23.90	0.94	42	34096	35.37	1.38								
70	11546	21.14	1.06	47	30693	31.84	1.53								
83	9701	17.77	1.15	61	23434	24.31	1.9								
103	7834	14.35	1.26	74	19530	20.26	2.1								
116	6982	12.78	1.28	86	16648	17.27	2.3								
138	5863	10.74	1.43	41	35166	36.48	0.86	K 167 KA 167	4						
171	4738	8.68	1.45	62	23338	24.21	1.29								
110kW						73	19800			20.54	1.52				
17	58625	88.46	0.80	K 187 KA 187	4	86	16657			17.28	1.81				
20	49267	74.34	0.95			81	17708	18.37	0.96	K 157 KF 157 KA 157 KAF157	4				
21	46173	69.67	1.02			100	14382	14.92	1.18						
24	41853	63.14	1.12			118	12194	12.65	1.39						
33	30307	45.73	1.55			200kW									
35	28332	42.75	1.66			33	55103	45.73	0.85	K 187 KA 187	4				
38	26178	39.50	1.80			45	40258	33.41	1.17						
42	23441	35.37	2.0			47	38366	31.84	1.23						
53	18610	28.08	2.5			59	30618	25.41	1.54						
29	34184	51.58	0.88	74	24413	20.26	1.69								
35	28325	42.74	1.06	86	20810	17.27	1.87								
41	24176	36.48	1.24	K 167 KA 167	4	61	29437	24.43	1.02	K 167 KA 167	4				
46	21618	32.62	1.39			73	24750	20.54	1.22						
54	18378	27.73	1.64			86	20906	17.35	1.44						
61	16191	24.43	1.86			100	17978	14.92	0.94			K 157 KF 157 KA 157 KAF157			
74	13420	20.25	2.2			118	15243	12.65	1.05						
86	11452	17.28	2.6												
60	15872	23.95	1.07			K 157 KF 157 KA 157 KAF157	4								
70	14123	21.31	1.20												
81	12174	18.37	1.39												
100	9888	14.92	1.71												
118	8384	12.65	2.0												



Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
200	5.0	279	K 37R17	0.18	1550	1.0	1388	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.25
	5.2	267				1.1	1218		
	5.9	234				1.3	1053		
	6.8	205				1.5	924		
	7.7	181	KF 37R17	0.37		1.7	815		
	8.7	160	KA 37R17			2.0	709		
	10	136	KAF37R17			2.2	622		
	11	127	2.5			552			
	13	110	0.37	2.9		485			
	14	96		3.2		428			
400	2.5	552	K 47R37	0.18		3.9	358		0.75
	2.8	495				4.3	320		
	3.3	416				4.9	283		1.1
	3.7	375				5.7	246		
	4.3	326	KF 47R37	0.25	0.34	4037	K 87R57 KF 87R57 KA 87R57 KAF87R57	0.18	
	4.8	289	KA 47R37		0.39	3609			
	5.6	250	KAF47R37		0.45	3107			
	6.3	219	0.51		2728				
	7.2	193	0.37	0.59	2371	0.25			
	8.3	167		0.67	2088				
	9.3	149		0.75	1854				
	11	128		0.84	1658	0.37			
	600	1.5	906	K 57R37	0.18			0.98	1415
		1.7	806					1.1	1229
2.0		699	1.3			1078		0.55	
2.3		615	1.5			951			
2.6		544	KF 57R37	0.25	1.7	837			0.75
2.9		473	KA 57R37		1.9	726			
3.3		421	KAF57R37		2.2	638			
3.8		362	0.37		2.5	562	1.1		
4.4		319		3.0	474				
5.1		273		3.3	426				
5.8		240		0.55	3.8	373	1.5		
6.5		215	4.2		330				
7.2		192	4.8		293	2.2			
8.4		166	5.6		250				
9.9	141	5.9	236						
11	126	7.0	201						
820	1.2	1171	K 67R37	0.18	0.23	6027	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.18	
	1.3	1034			0.26	5392			
	1.5	903			0.30	4669			
	1.8	793			0.34	4082			
	2.0	697	KF 67R37	0.25	0.39	3583			
	2.3	613	0.45		3108				
	2.6	542	0.51		2757	0.37			
	3.0	471	0.58		2419				
	3.3	420	0.66	2123					
	3.9	361	KAF67R37	0.55	0.75	1856		0.55	
	4.3	323	0.86		1625				
	5.1	272	0.98		1430				
	5.8	240	1.1		1261	0.75			
	1550	6.4	217	0.75	1.3			1102	1.1
7.3		191	1.5		957				
0.59		2370	1.6		855	1.5			
0.68		2050	1.9		743				
0.78		1772	2.1	651	2.2				
0.92		1514	2.4	573					
			2.8	504					
			3.2	437					
			3.6	382					
			4.1	342					

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。

The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.




Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p							
4300	4.6	305	K 97R57	3.0	13000	1.5	899	K 127R77	3.0							
	5.4	258	KF 97R57			1.8	790			KF 127R77						
	6.0	232	KA 97R57			2.0	690				KA 127R77					
	7.1	199	KAF97R57	2.3		599	KAF127R77									
8000	0.13 0.15 0.17	10528 9391 8211	K 107R77 KF 107R77 KA 107R77 KAF107R77	0.18		3.0		468	K 127R87	5.5						
						0.19 0.23 0.25		7167 6097 5582			0.25	3.4	410	KF 127R87		
							0.27 0.32 0.37					5065 4299 3757	0.37		2.6	536
	0.43 0.48 0.56	3236 2869 2504		0.55					3.8 4.2 4.8	367 330 290					KAF127R87	7.5
						0.63 0.74		2203 1869			0.75			0.08 0.09 0.10 0.11 0.12 0.14 0.16 0.18		
							0.83 0.91 1.1					1689 1533 1317	1.1			
	1.2 1.4 1.6	1150 1015 871		1.5					0.48 0.60	2899 2319					KF 157R97	1.5
						1.8 2.0 2.3		782 686 606			2.2			0.69 0.77 0.83 1.0		
							2.7 3.1					515 455	3.0			
	3.6 4.1	402 351		4.0	1.5 1.6 1.8				942 854 756	4.0						
						4.7 5.2 5.9		307 277 243			5.5			2.1 2.5	661 565	5.5
							0.08 0.09 0.10 0.11					17550 16006 14975 12440	0.18			
	0.13 0.14	10914 9819		0.25	5.0				290	11						
						0.16 0.19 0.21		8443 7483 6565			0.37			4.8	307	K 157R107
							0.24 0.28 0.31 0.37					5804 5027 4423 3801	0.55			
	0.43 0.47	3237 2941		0.75	0.07 0.08 0.09 0.11 0.12 0.14				19653 17345 14945 13190 11532 10227	K 167R97						
						0.55 0.63 0.72		2548 2218 1926			1.1			0.16	8597	KA 167R97
							0.79 0.90					1757 1541	1.5			
	1.0 1.2 1.4	1342 1177 1025		2.2	0.29 0.34				4798 4059	1.5						

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。 The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.



Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
32000	0.42	3359	K 167R97 KA 167R97	2.2	50000	2.0	720	K 187R107 KA 187R107	15
	0.52	2741				2.4	614		
	0.63	2252		3		2.9	514		18.5
	0.65	2174				3.3	449		
	0.85	1698		4		4.0	365		30
	1.0	1402				5.5	268		37
	1.1	1291		5.5		6.5	227		
	1.3	1101				7.4	199		45
	1.5	944		7.5		8.8	168		
	1.7	843							
	1.9	757							
	2.6	561	K 167R107 KA 167R107	11					
	3.0	479							
	3.4	422		15					
	3.9	367							
	4.7	313		18.5					
	5.4	273							
	5.9	250		22					
	6.7	218							
	7.2	203		30					
	7.9	185							
	9.0	163		37					
	11	139							
	12	121		45					
50000	0.04	32625	K 187R97 KA 187R97	0.55					
	0.05	27165							
	0.06	24353							
	0.07	19144							
	0.08	16978							
	0.10	14272		0.75					
	0.11	13116							
	0.12	11647							
	0.13	10413		1.1					
	0.15	9363							
	0.17	8126							
	0.19	7333		1.5					
	0.21	6738							
	0.24	5984							
	0.27	5350		2.2					
	0.30	4810							
	0.33	4364							
	0.39	3609		3					
	0.46	3062							
	0.56	2519		4					
	0.63	2268							
	0.69	2054							
	0.78	1821		5.5					
	0.88	1605							
	1.0	1395		7.5					
	1.2	1196							
	2.0	737		15					
	2.4	619							
	2.8	524		18.5					

表上所配功率均有超载,按实际条件确定的转矩不得大于减速机额定转矩。 The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.

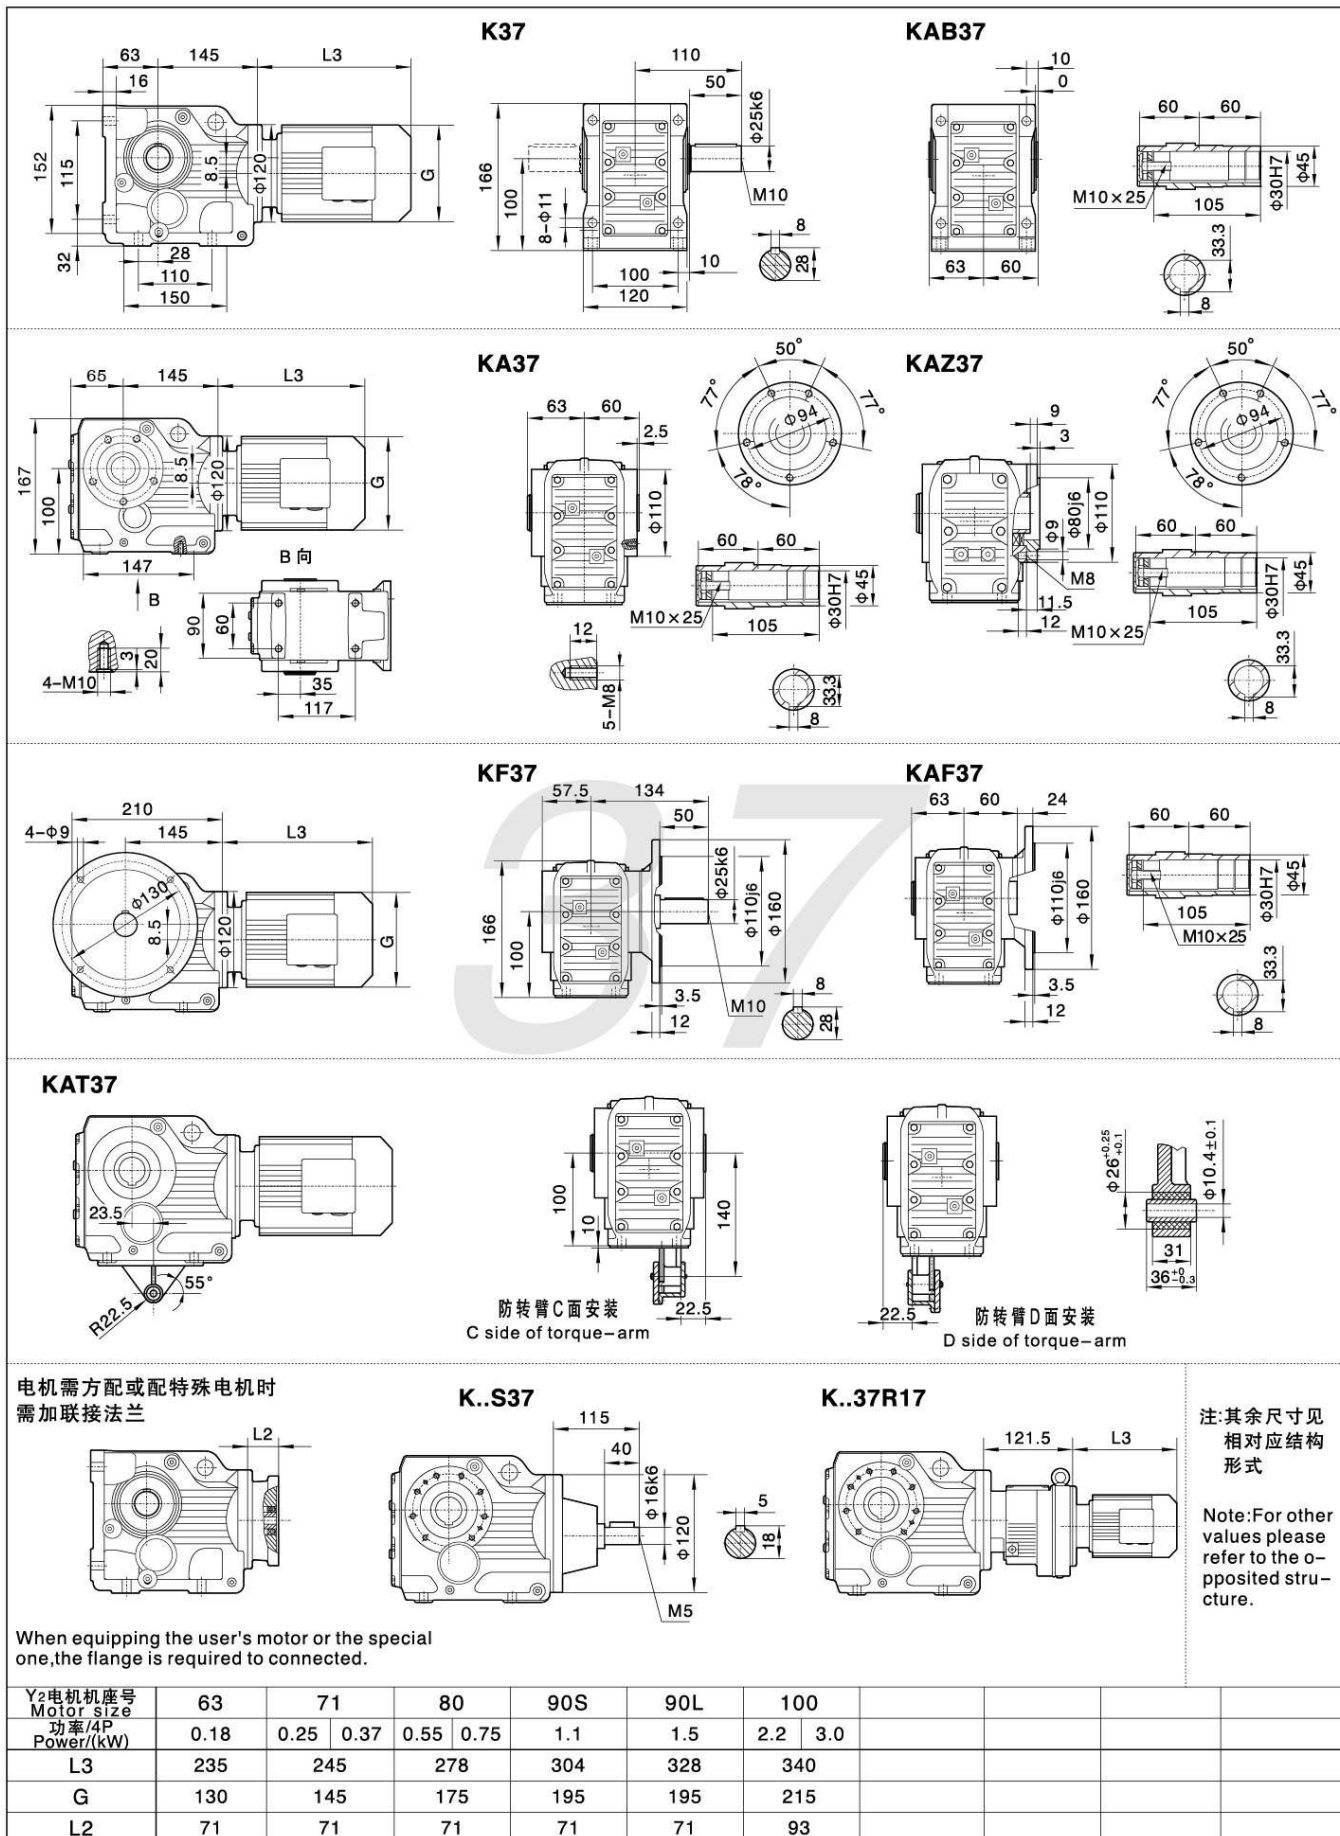




Mounting Dimension Sheets-overview



防转臂D面安装
D side of torque-arm

电机需方配或配特殊电机时需加联接法兰




Note:For other values please refer to the opposed structure.

When equipping the user's motor or the special one, the flange is required to be connected.


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB。

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.

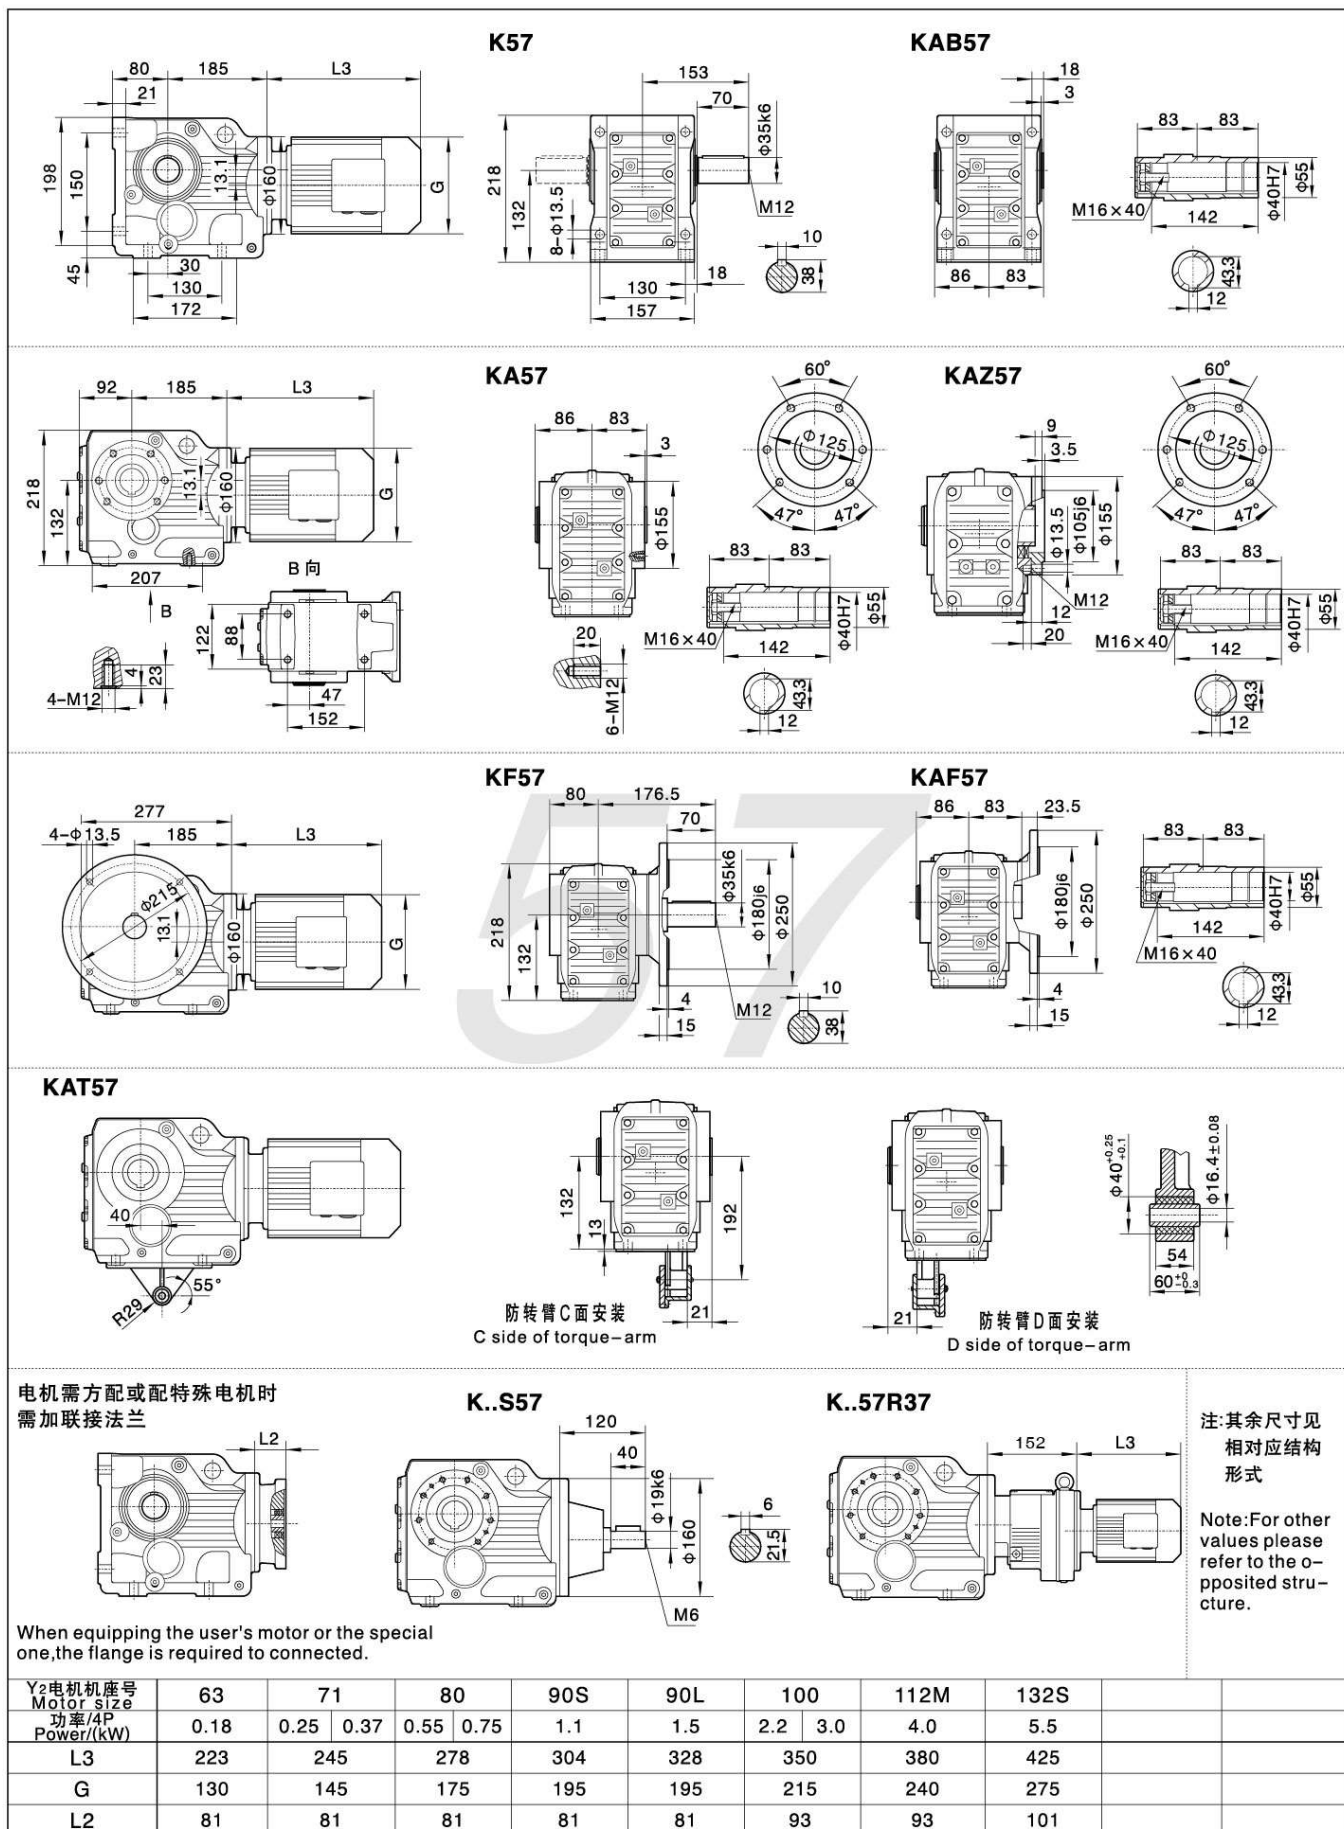






K

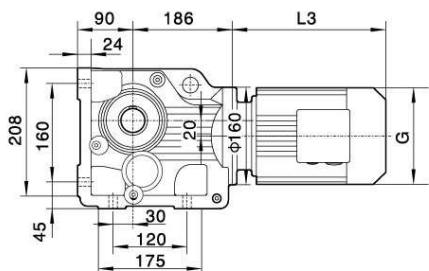


K67





KAB67

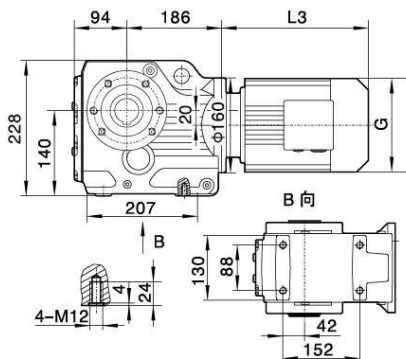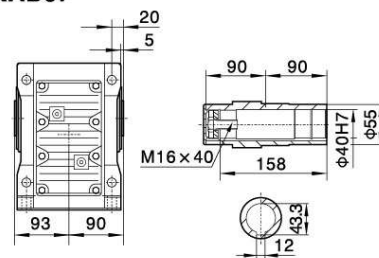


KA67

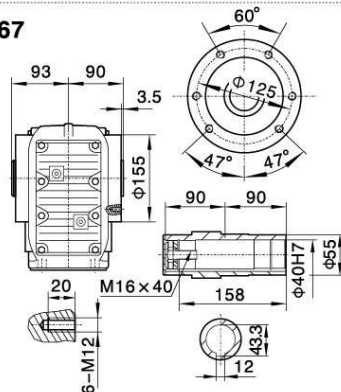


KAZ67

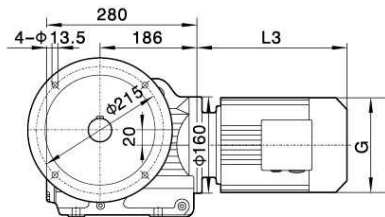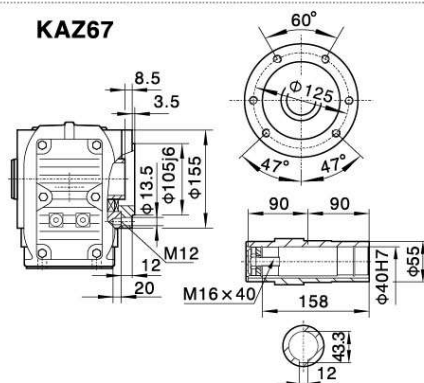



KF67

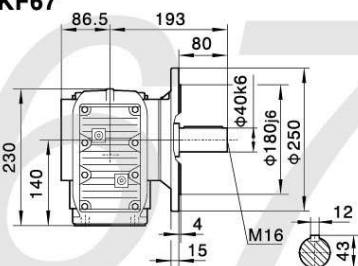


KAF67

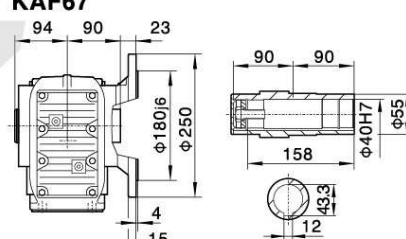

KAT67




防转臂C面安装
C side of torque-arm

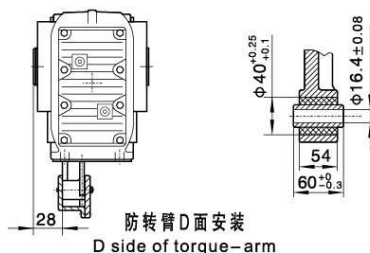


防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



K..S67

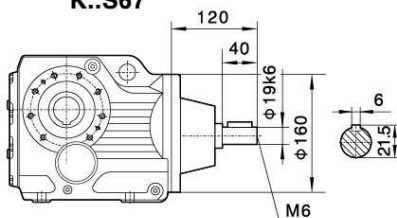

K..67R37

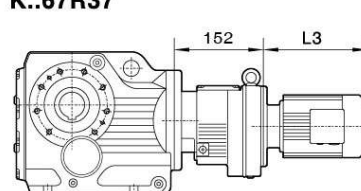

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.


Y2电机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		

注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.


Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.





K

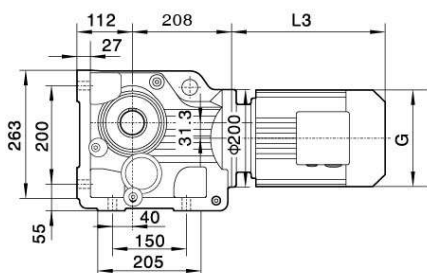


K77





KAB77

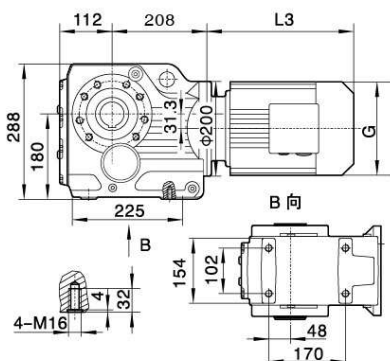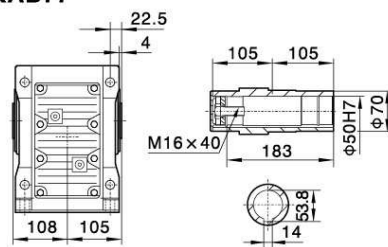


KA77

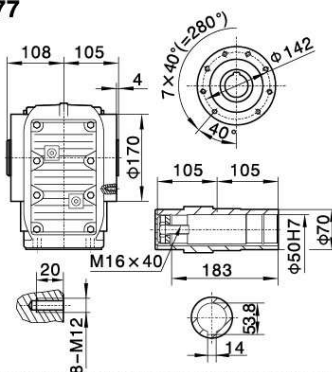


KAZ77

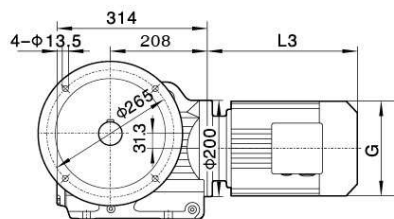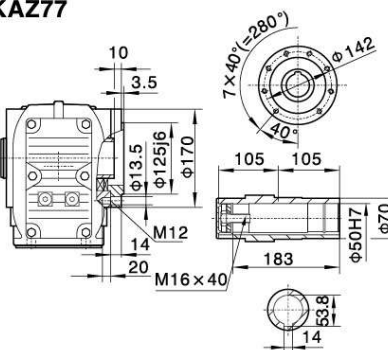




KF77

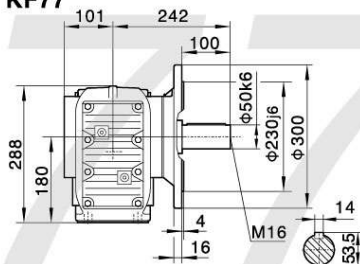


KAF77

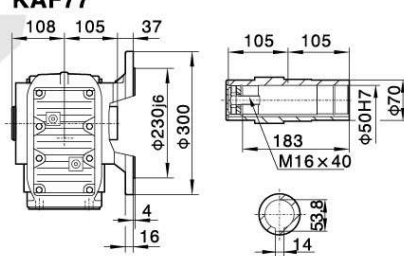


KAT77

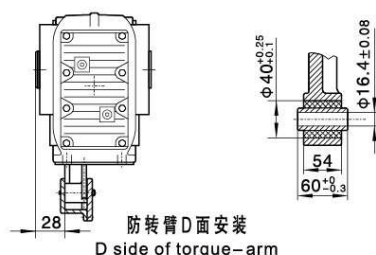


电机需方配或配特殊电机时
需加联接法兰



K..S77

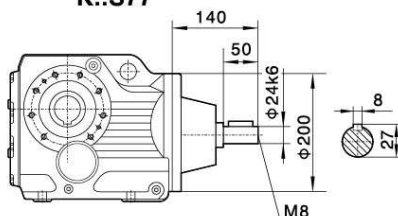

K..77R37

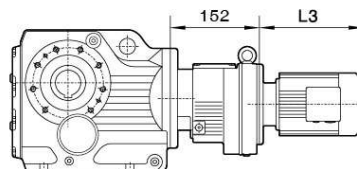

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.


Y2电机座号 Motor size 功率/4P Power/(kW)	71	80	90S	90L	100	112M	132S	132M	160M
L3	233	278	304	328	350	380	425	461	524
G	145	175	195	195	215	240	275	275	330
L2	81	81	81	81	93	93	101	101	126

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.


Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.





K

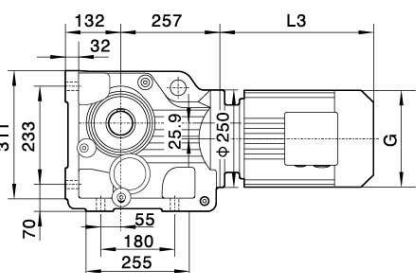


K87





KAB87

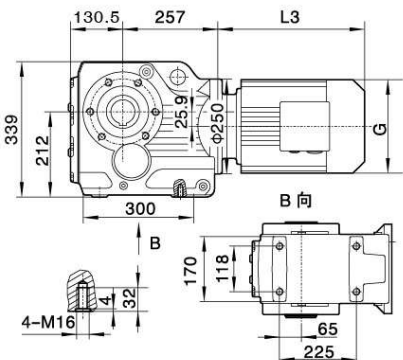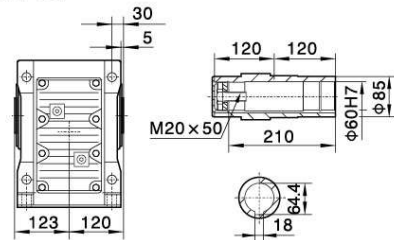


KA87

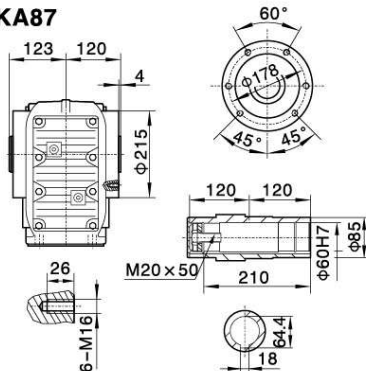


KAZ87

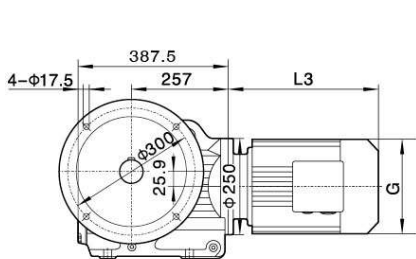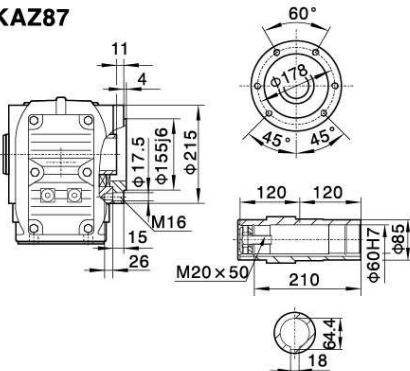



KF87

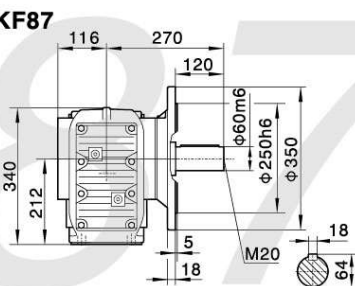


KAF87

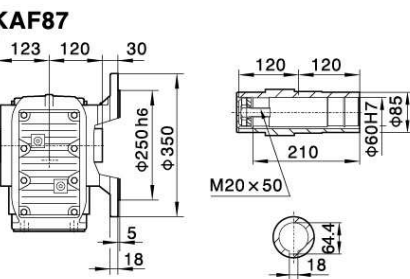


KAT87




防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm




电机需方配或配特殊电机时
需加联接法兰



K..S87

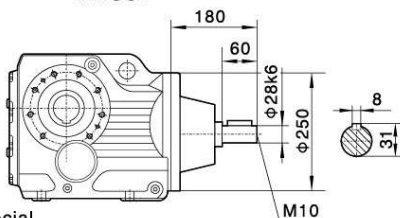

K..87R57

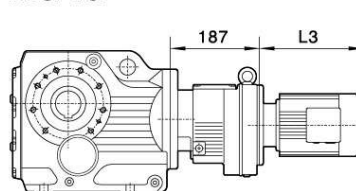

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机座号 Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
功率/4P Power/(kW)	0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22
L3	246	280	304	350	380	425	461	524	547	583	616
G	175	195	195	215	240	275	275	330	330	380	380
L2	86	86	86	71	71	101	101	126	126	126	126

注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.


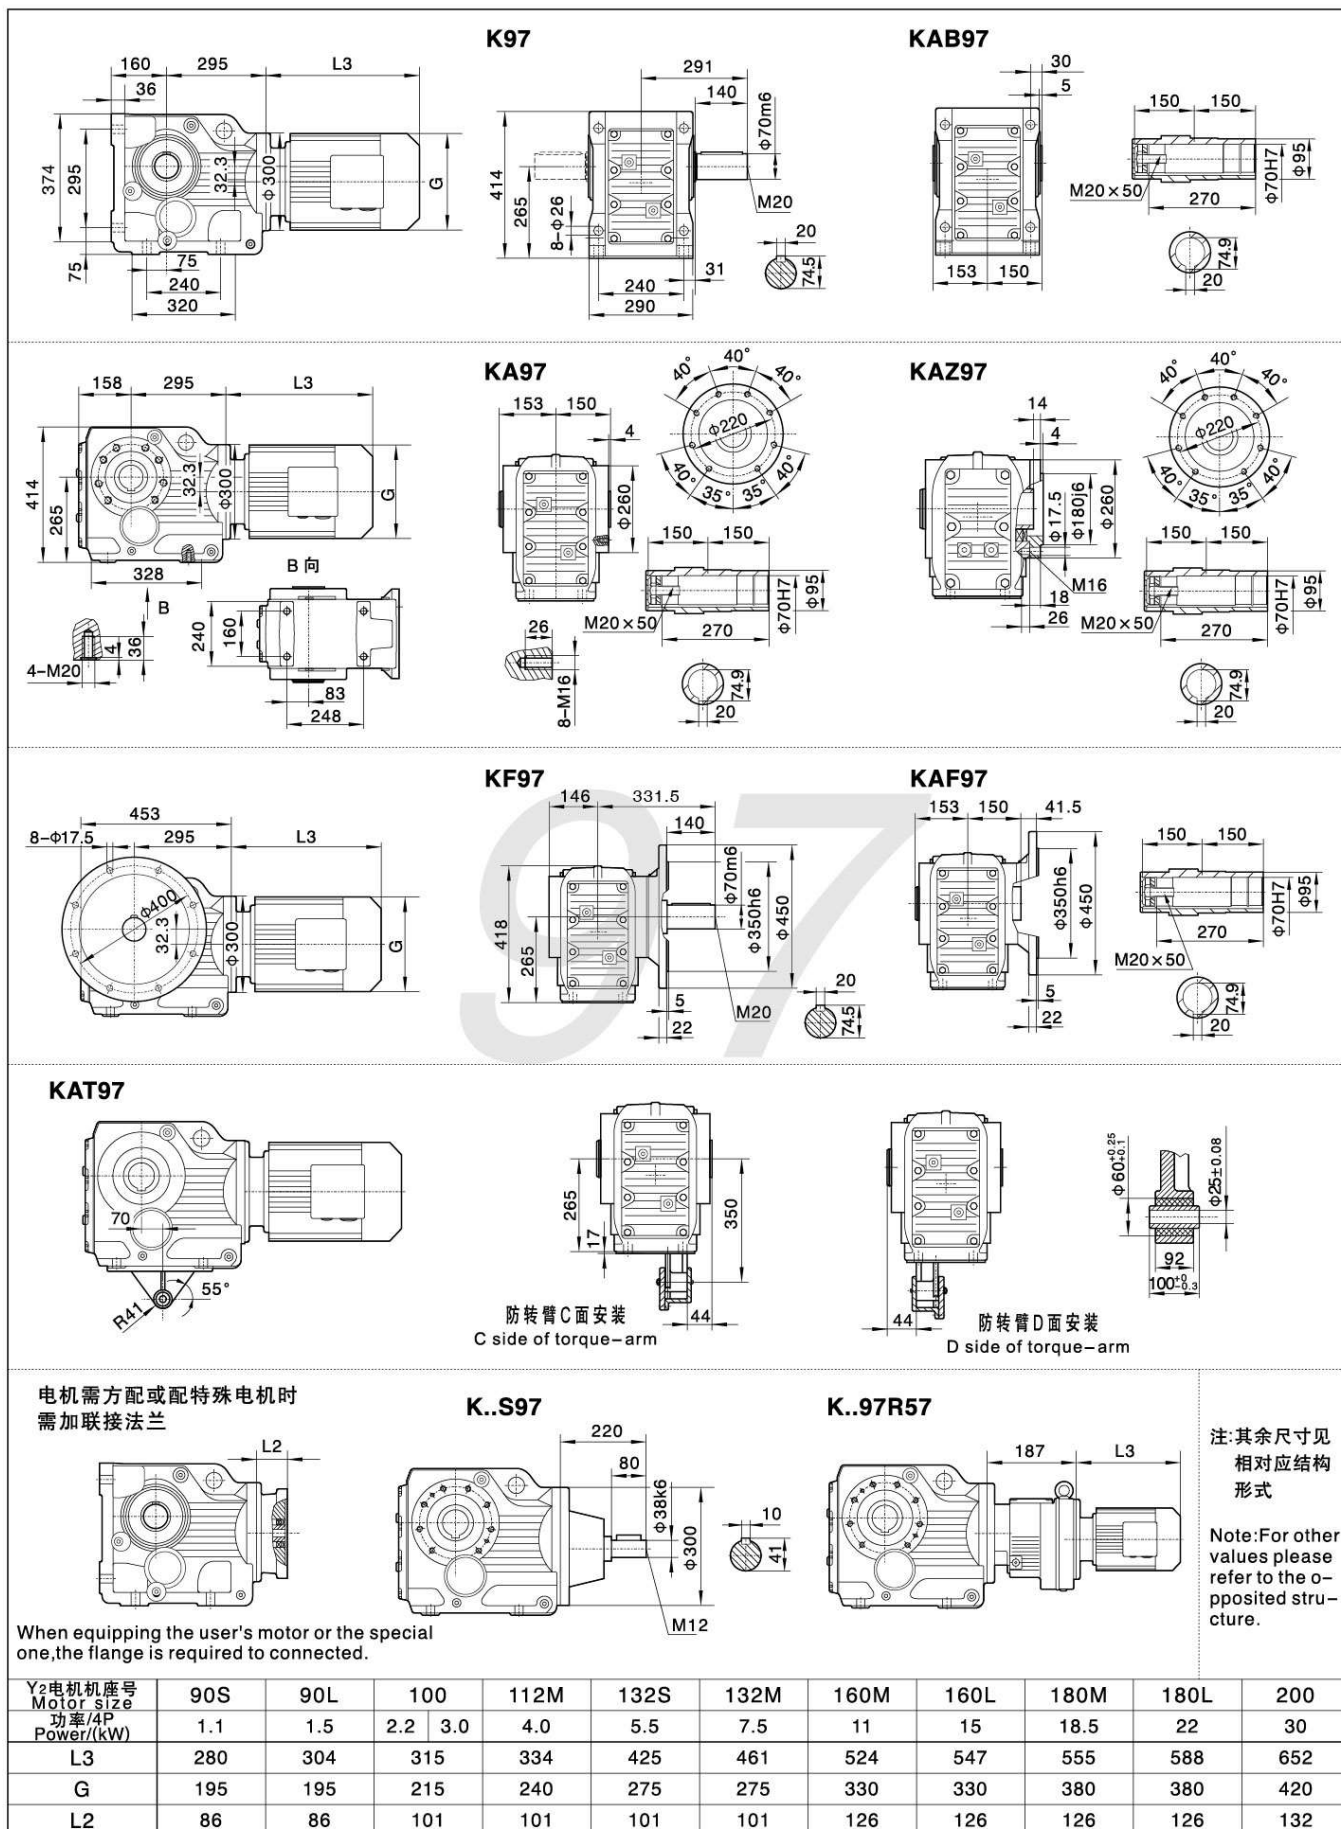


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。2."K.."表示K、KA、KF、KAF、KAZ、KAB。


Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.





K107

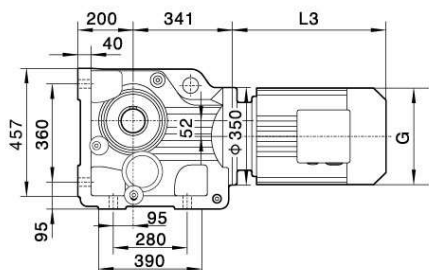


KAB107

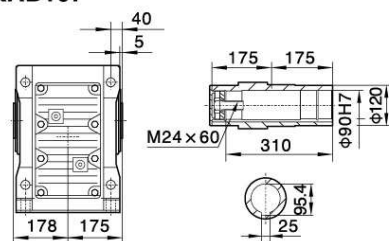



KA107

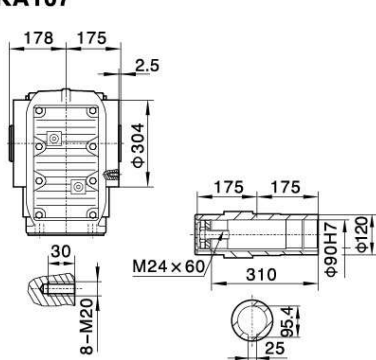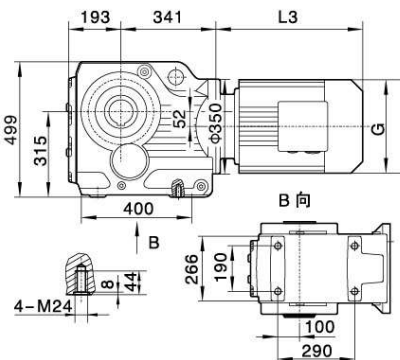


KAZ107

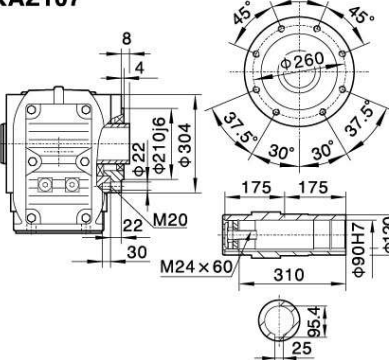




KF107

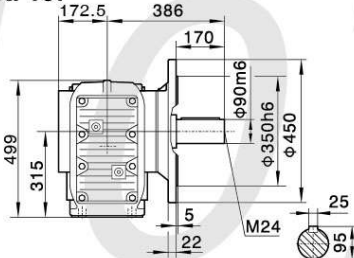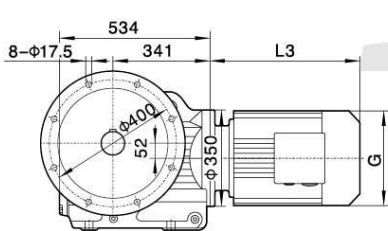


KAF107

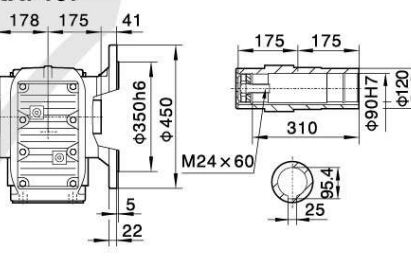


KAT107

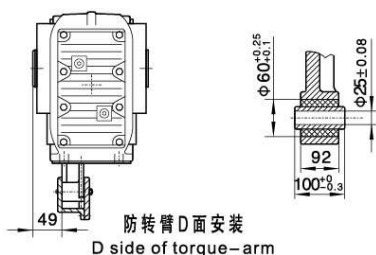


电机需方配或配特殊电机时
需加联接法兰



K..S107

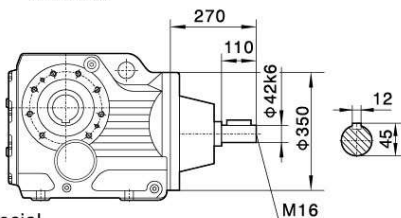

K..107R77

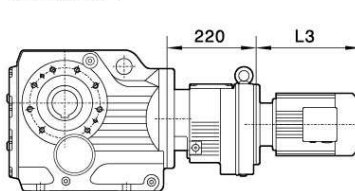

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.



Y2电机座号 Motor size	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M
功率/4P Power/(kW)	3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	318	334	386	422	504	519	555	588	654	680	702
G	215	240	275	275	330	330	380	380	420	470	470
L2	101	101	101	101	126	126	126	126	132	132	132

注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.


Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.





K127

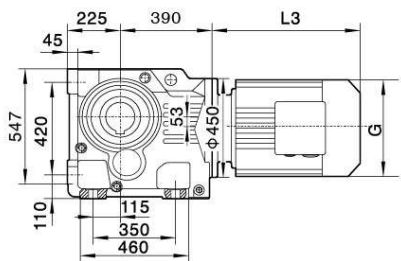


KA(KAB)127





KAZ127




KA127/KAF127/KAZ127
空心轴/Hollow shaft







KF127

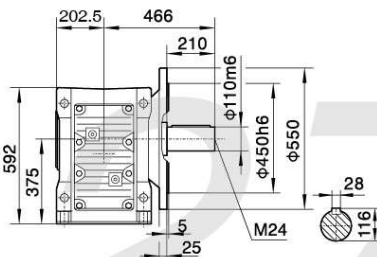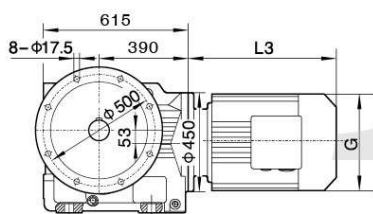


KAF127




KAT127




电机需方配或配特殊电机时
需加联接法兰



K..S127

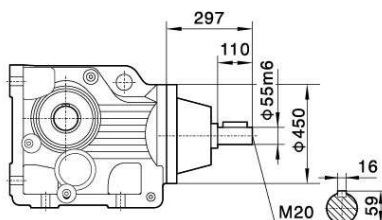

K..127R77(R87)

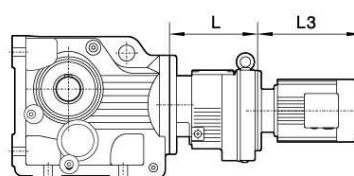

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机机座号 Motor size	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
功率/4P Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	424	567	602	583	616	654	674	696	775	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	132	132	132	132	132	132	143	143	174	174	174


注:1.以上壳体为通用件, 安装尺寸均可相互参照。

2."K.."表示K, KA, KF, KAF, KAZ, KAB.


Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.

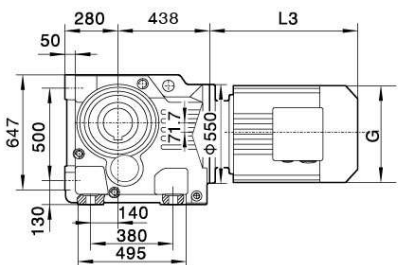


K157




KA(KAB)157





KAZ157




KA157/KAF157/KAZ157
空心轴/Hollow shaft







KF157

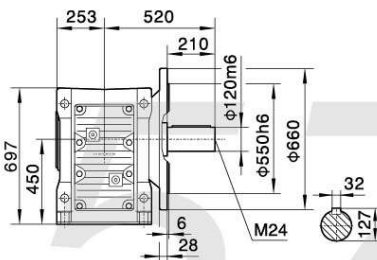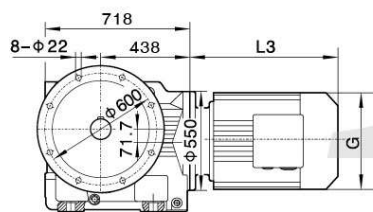


KAF157




KAT157




电机需方配或配特殊电机时
需加联接法兰



K..S157

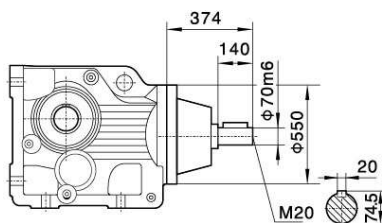

K..157R97(R107)

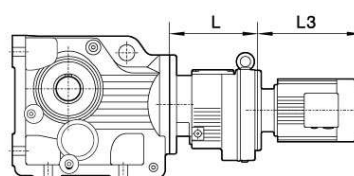

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机机座号 Motor size	160M	160L	180M	180L	200	225S	225M	K..157R97		K..157R107		315S	315M	315L
								L	320	L	361			
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160	
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270	
G	330	330	380	380	420	470	470	510	580	580	645	645	645	
L2	143	143	143	143	143	143	143	143	143	143	145	145	145	


注:1.以上壳体为通用件, 安装尺寸均可相互参照。

2."K.."表示K、KA、KF、KAF、KAZ、KAB。

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.


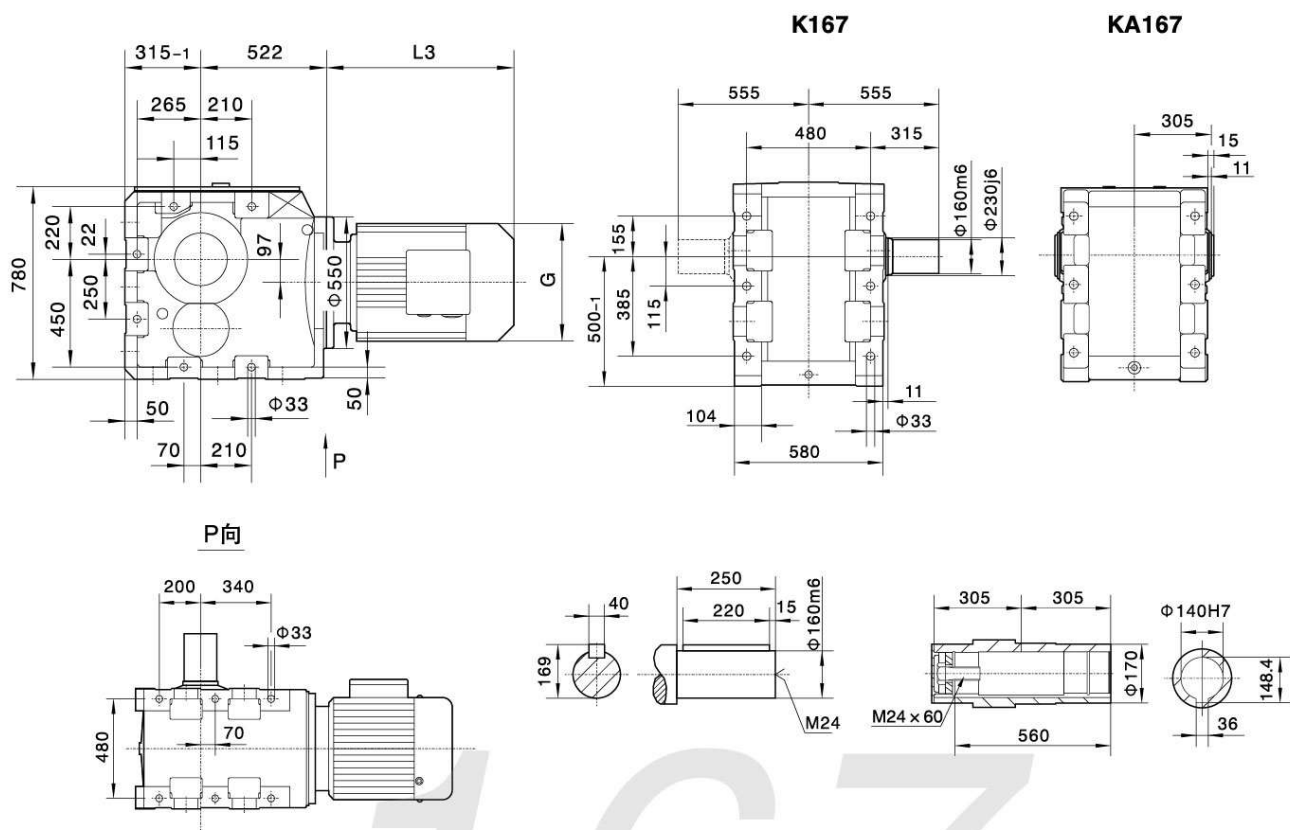


K

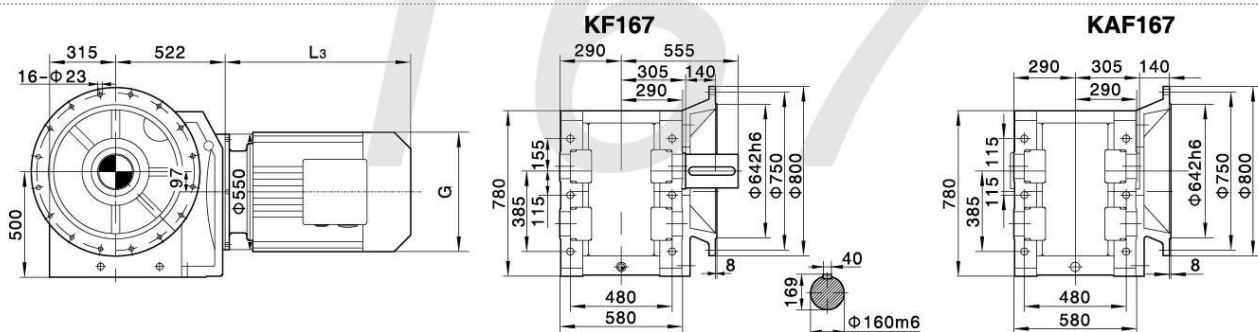


电机需方配或配特殊电机时
需加联接法兰

K..S167

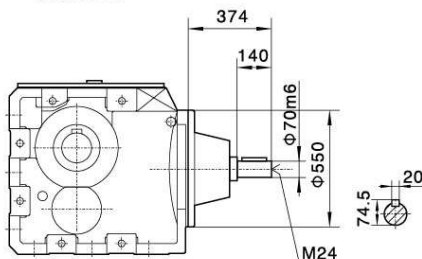

K..167R97(R107)

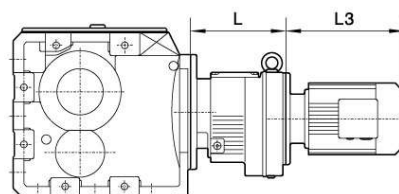

When equipping the user's motor or the special one, the flange is required to be connected.

注: 其余尺寸见相对应结构形式

Note: For other values please refer to the opposed structure.

Y2电机机座号 Motor size 功率/4P Power/(kW)	160M	160L	180M	180L	200L	225S	225M	250M	280S	K..167R97		K..167R107	
										L	320	370	
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	76	76	76	76	76	98	98	103	103	103	132	132	132






注: 1. 以上壳体为通用件, 安装尺寸均可相互参照。

2. "K.."表示K, KA, KF, KAF, KAZ, KAB.




Note: 1. The housings of KA, KF, KAF, KAZ are common parts. The mounting dimensions may consult each other. 2. "K.."mean K, KA, KF, KAF, KAZ, KAB.



Mounting Dimension Sheets-overview



K..S187

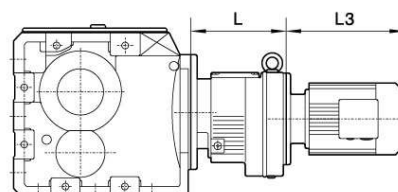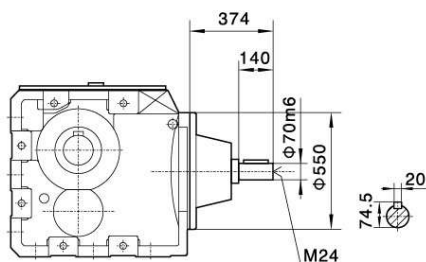

Note: For other values please refer to the opposed structure.

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.